

Product: KUBIK SLIM ASY LED 4X1,7W 4000K E IP65 21

Index: 19.3155.0001.21



Description

The luminaire is intended for lighting passages, roads next to buildings, fences etc. Optical system based on lenses with asymmetrical distribution. The body is made of aluminum painted with special facade paint which is resistant to bad weather conditions. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application of the Kubik-type fitting almost in every building. The assembly and accessibility of the internal parts are very easy. The fitting is featured by a high level of protection against the penetration of solids and water: IP65. The fitting has a low height. Stands out of the building wall only 5 cm.

Product information


Category	Outdoor luminaires
Family	KUBIK SLIM ASY LED
Name	KUBIK SLIM ASY LED 4X1,7W 4000K E IP65 21
Index	19.3155.0001.21
EAN	5902107254636



Light and electrical data



Light source	LED
Luminous flux LED [lm]	608
LED power [W]	5
Luminaire luminous flux [lm]	494
Power of luminaire [W]	10
Luminaire's light efficiency [lm/W]	49,4
Color of the light [K]	4000
CRI	>80
Beam angle [°]	asymmetric light distribution - $I_{max} = -36^\circ$
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,5
Circuit load capacity	40 (B10), 78 (B16), 132 (C10), 158 (C16)

Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	RAL 9006 (grey, metallic, fine structure)
Diffuser	transparent polycarbonate
Impact resistant	IK09
Weight [kg]	0,6
Dimensions [mm]	120 x 52 x 120

A graph of light

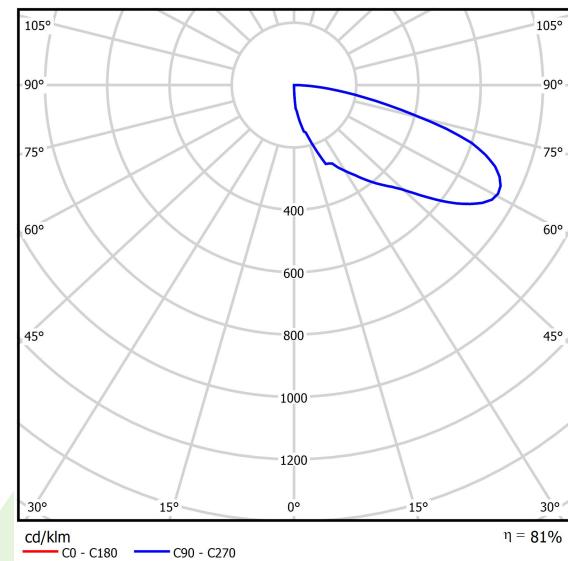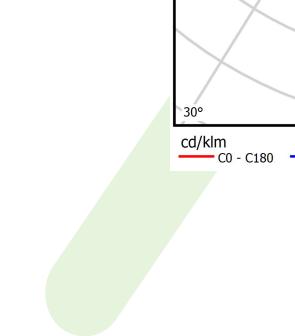

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026