

**Product:** KUBIK OUT WALL LED 7500 STREET-M E IP65 22 757

**Index:** 19.3156.0001.22



## Description

Outdoor luminaire for assembling on a wall, equipped with the highly effective power saving LED sources of the newest generation. The system is designed and optimized for lighting streets, parks, gardens. Corrosion resistant extruded aluminum aesthetic housing and special pole arrangement. Easy installation, tool less, easy maintenance. Optimal performance with a glare-free, full cutoff, uniform lighting distribution.

## Product information



|          |  |
|----------|--|
| Category | Outdoor luminaires                             |
| Family   | KUBIK OUT WALL LED                             |
| Name     | KUBIK OUT WALL LED 7500 STREET-M E IP65 22 757 |
| Index    | 19.3156.0001.22                                |
| EAN      | 5902107170462                                  |



## Light and electrical data

|                                     |                                       |
|-------------------------------------|---------------------------------------|
| Light source                        | LED                                   |
| Luminous flux LED [lm]              | 7450                                  |
| LED power [W]                       | 49                                    |
| Luminaire luminous flux [lm]        | 6008                                  |
| Power of luminaire [W]              | 54                                    |
| Luminaire's light efficiency [lm/W] | 111,3                                 |
| Color of the light [K]              | 5700                                  |
| CRI                                 | >70                                   |
| Beam angle [°]                      | street light distribution             |
| Protection against electric shock   | I                                     |
| Protection degree                   | IP65                                  |
| Voltage                             | 220..240 V, 50..60 Hz                 |
| Lifetime of LED sources [h]         | 60000                                 |
| Lx/By                               | L70/B10                               |
| Operating temperature range [°C]    | -40 ÷ 40                              |
| Driver                              | standard on/off (E)                   |
| Circuit load capacity               | 6 (B10), 11 (B16), 11 (C10), 18 (C16) |

## Mechanical data

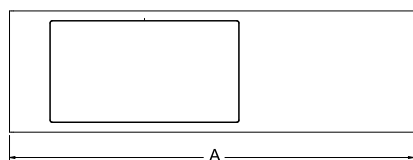

|                  |  |
|------------------|--|
| Assembly         | mounted on wall                                |
| Material         | aluminum                                       |
| Color            | RAL 9007 (dark grey, metallic, fine structure) |
| Diffuser         | transparent polycarbonate                      |
| Impact resistant | IK04   |
| Weight [kg]      | 4,85   |
| Dimensions [mm]  | 500 x 150 x 100                                |

A graph of light

