

Product: KUBIK OUT WALL LED 7500 STREET-M E IP65 22 757

Index: 19.3156.0001.22



## Description

Outdoor luminary for assembling on a wall, equipped with the highly effective power saving LED sources of the newest generation. The system is designed and optimized for lighting streets, parks, gardens. Corrosion resistant extruded aluminum aesthetic housing and special pole arrangement. Easy installation, tool less, easy maintenance. Optimal performance with a glare-free, full cutoff, uniform lighting distribution.

## Product information


Category	Outdoor luminaires
Family	KUBIK OUT WALL LED
Name	KUBIK OUT WALL LED 7500 STREET-M E IP65 22 757
Index	19.3156.0001.22
EAN	5902107170462



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	7450
LED power [W]	49
Luminaire luminous flux [lm]	6008
Power of luminaire [W]	54
Luminaire's light efficiency [lm/W]	111,3
Color of the light [K]	5700
CRI	>70
Beam angle [°]	street light distribution
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L70/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Circuit load capacity	6 (B10), 11 (B16), 11 (C10), 18 (C16)

## Mechanical data

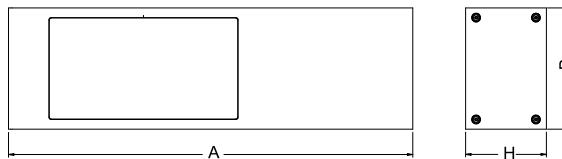

Assembly	mounted on wall
Material	aluminum
Color	RAL 9007 (dark grey, metallic, fine structure)
Diffuser	transparent polycarbonate
Impact resistant	IK04
Weight [kg]	4,85
Dimensions [mm]	500 x 150 x 100

## A graph of light

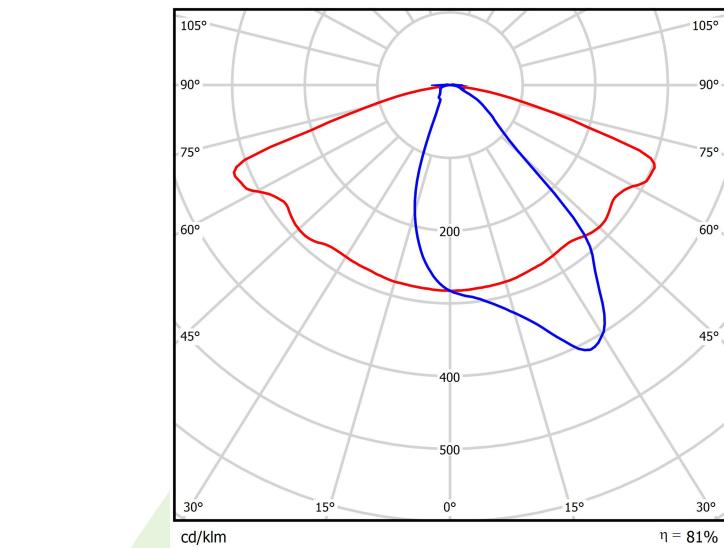

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026