

Product: KUBIK POLE 900 3/3/3/3 LED 1,7W E IP65 22 6500K

Index: 19.3160.0084.22



Description

Outdoor luminaire for assembling on a hardened surface (concrete, sett, or basement) equipped with the highly effective power saving LED sources of the newest generation. It is dedicated to illuminate pedestrian router such as park alleys, parking spaces communication routes, estate entrances. Luminaire body coated with facade paint dedicated for outdoor usage, light sources placed in upper part of the luminaire with the asymmetric lens providing illumination of the area. IP65 hermetic luminaire, IK09 strike resistant. Luminaire available in variety of colors from RAL color palette upon the clients request. Luminaire height: 300, 600, 900, 3000 and 4000 mm.

Product information

Category	Outdoor luminaires
Family	KUBIK POLE LED
Name	KUBIK POLE 900 3/3/3/3 LED 1,7W E IP65 22 6500K
Index	19.3160.0084.22
EAN	5901867439567



Light and electrical data


Light source	LED
Luminous flux LED [lm]	2064
LED power [W]	20
Luminaire luminous flux [lm]	1679
Power of luminaire [W]	23
Luminaire's light efficiency [lm/W]	73
Color of the light [K]	6500
CRI	>80
Beam angle [°]	asymmetric light distribution
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,5
Circuit load capacity	20 (B10), 30 (B16), 33 (C10), 53 (C16)

Mechanical data



Assembly	for the ground
Material	aluminum
Color	RAL 9007 (dark grey, metallic, fine structure)
Diffuser	transparent polycarbonate
Impact resistant	IK09
Dimensions [mm]	150 x 150 x 900


A graph of light

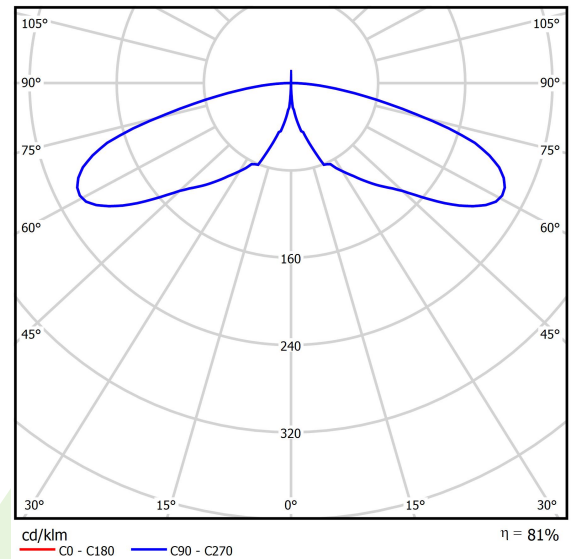

Accessories

Index 2TJ5782-3

Name 5782-3 Foundations RAL9007



Index 2TJ5782-4

Name 5782-4 Foundations

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 22-08-2025