

Product: KUBIK POLE SOFT 100 LED 3S 750 3300 E IP65 22 840

Index: 19.3162.0001.22



Description

Outer luminaire to be mounted on a solid surface (concrete, sett, or substructure) equipped with highly efficient energy saving LED sources of the newest generation. Luminaire dedicated to illuminate pedestrians routes such as park alleys, parking site passages, property entrances. Its body made from aluminum (profile size 100x100mm) which is coated by the facade powder used for outdoor activities. PLX opal diffuser

Product information

| | |
|----------|---|
| Category | Outdoor luminaires |
| Family | KUBIK POLE SOFT 100 LED |
| Name | KUBIK POLE SOFT 100 LED 3S 750 3300 E IP65 22 840 |
| Index | 19.3162.0001.22 |
| EAN | 5902107207090 |



Light and electrical data


| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 3309 |
| LED power [W] | 19 |
| Luminaire luminous flux [lm] | 1745 |
| Power of luminaire [W] | 21 |
| Luminaire's light efficiency [lm/W] | 83,1 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | asymmetric light distribution |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | -25 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 11 (B10), 17 (B16), 18 (C10), 29 (C16) |

Mechanical data



| | |
|------------------|---|
| Assembly | for the ground |
| Material | aluminum |
| Color | RAL 9007 (dark grey, metallic, fine structure) |
| Diffuser | PMMA opal |
| Impact resistant | IK08 |
| Dimensions [mm] | 160 x 160 x 750 |

A graph of light

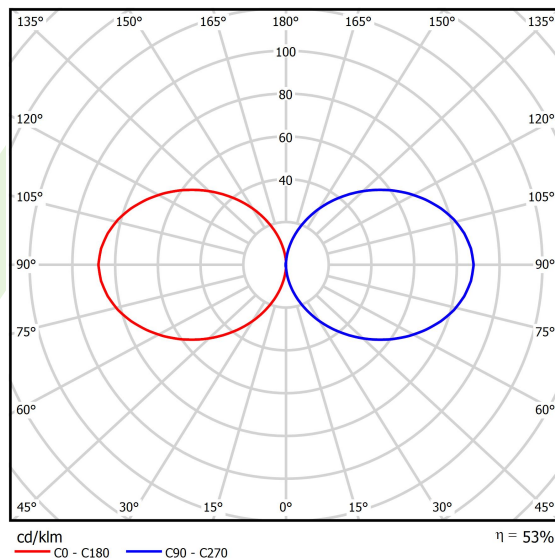

Accessories

Index 2TJ8565-7

Name 8565-7 Foundations RAL9007

