

Product: KUBIK WALL ECO LED UP OR DOWN 1X G9 IP54 25

Index: 19.3165.0001.25



Description

Luminaire for removable LED sources, called Retrofit, matching the G9 holder. The body is made of aluminum painted with a special facade paint resistant to weather conditions. PMMA opal. Very easy assembly and access to the interior. Recommended for balconies lighting.

Product information

Category	Outdoor luminaires
Family	KUBIK WALL ECO LED IP54
Name	KUBIK WALL ECO LED UP OR DOWN 1X G9 IP54 25
Index	19.3165.0001.25



Light and electrical data


Light source	RETROFIT G9 (not included)
Luminous flux LED [lm]	depending on applied light source
LED power [W]	depending on applied light source
Luminaire luminous flux [lm]	depending on applied light source
Power of luminaire [W]	depending on applied light source
Luminaire's light efficiency [lm/W]	depending on applied light source
Color of the light [K]	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Beam angle [°]	(C0-C180) / (C90-C270) - 111,4° / 111,4°
Protection against electric shock	I
Protection degree	IP54
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
Driver	none

Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	PMMA opal
Weight [kg]	0,89
Dimensions [mm]	100 x 100 x 110

A graph of light

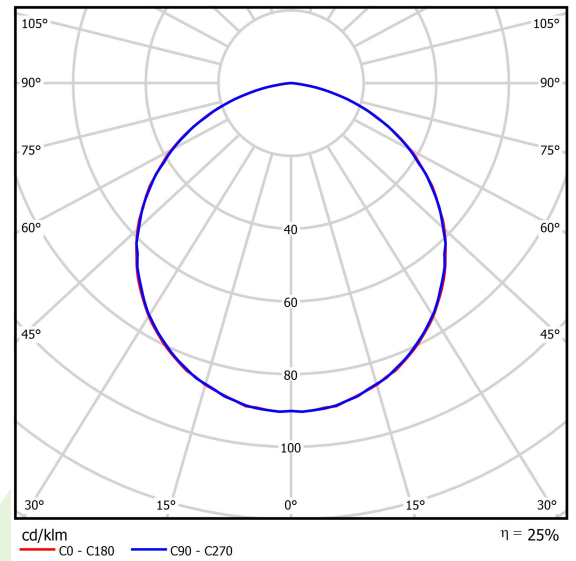

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 02-07-2022