

Product: LUXWALL LED 3300 OPTICS-1L PC-T E IP65 25 830

Index: 19.3168.0001.25



Description

An outdoor fitting made for illuminating building facades and creating lighting effects. The body is made of aluminum painted with special facade paint which is resistant to bad weather conditions. Energy-efficient fitting made of component parts produced by renowned companies. The fitting is featured by a high level of protection against the penetration of solids and water: IP65, which renders the fitting an interesting decorative solution highlighting the architecture of an illuminated building.

Product information


Category	Outdoor luminaires
Family	LUXWALL LED
Name	LUXWALL LED 3300 OPTICS-1L PC-T E IP65 25 830
Index	19.3168.0001.25



Light and electrical data


Light source	LED
Luminous flux LED [lm]	3316
LED power [W]	17,4
Luminaire luminous flux [lm]	2433
Power of luminaire [W]	19,2
Luminaire's light efficiency [lm/W]	126,7
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 86,8° / 101,6°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)

Mechanical data

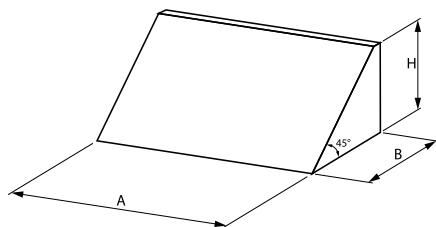

Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	PC-T (transparent polycarbonate)
Impact resistant	IK06
Weight [kg]	3
Dimensions [mm]	360 x 240 x 220

A graph of light

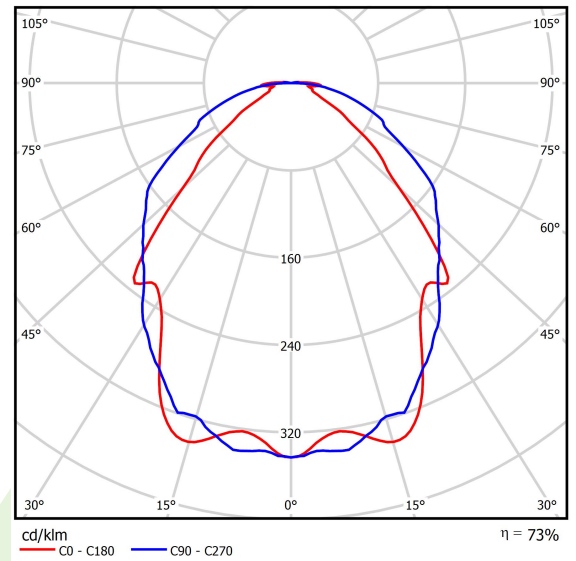

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 26-09-2023