


Product: TOSCA SLIM LED 900 2000 OPAL E 22 840

Index: 19.3179.0002.22

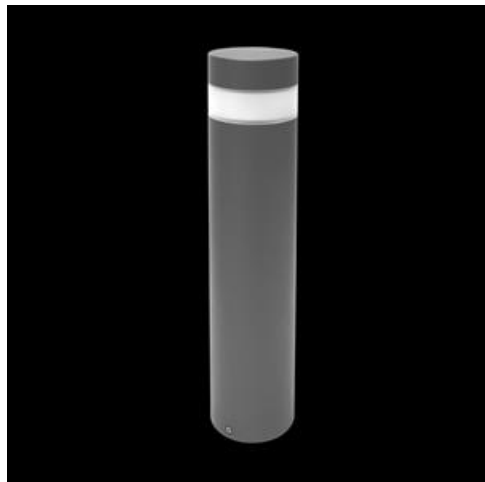

Description

Outdoor luminaire to be mounted on hard surface, equipped in the latest generation, highly efficient and energy saving LED sources. Aluminium made housing is corrosion resistant. Product is designated to efficient illumination of walking paths, parks, recreational areas, residential areas. Level of protection against penetration of dust, moisture and solids: IP65

Product information


| | |
|----------|---------------------------------------|
| Category | Outdoor luminaires |
| Family | TOSCA SLIM LED |
| Name | TOSCA SLIM LED 900 2000 OPAL E 22 840 |
| Index | 19.3179.0002.22 |
| EAN | 5902107177133 |



Light and electrical data

| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 2140 |
| LED power [W] | 15 |
| Luminaire luminous flux [lm] | 1351 |
| Power of luminaire [W] | 17 |
| Luminaire's light efficiency [lm/W] | 79,5 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 96,4° / 94,6° |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 50000 |
| Lx/By | L90/B50 |
| Operating temperature range [°C] | -20 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 20 (B10), 30 (B16), 33 (C10), 53 (C16) |

Mechanical data



| | |
|------------------|---|
| Assembly | for the ground |
| Material | aluminum |
| Color | RAL 9007 (dark grey, metallic, fine structure) |
| Diffuser | PMMA opal |
| Impact resistant | IK08 |
| Weight [kg] | 5,3 |
| Dimensions [mm] | Ø120 x 900 |

A graph of light

