

Product: STREETPARK S LED COMPACT HO 10000 STREET-M E IP66 22 757**Index:** 19.3250.0004.22

Description

Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 60 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 5700 K.

Product information


| | |
|----------|---|
| Category | Compact |
| Family | STREETPARK LED COMPACT |
| Name | STREETPARK S LED COMPACT HO 10000 STREET-M E IP66 22 757 |
| Index | 19.3250.0004.22 |



Light and electrical data


| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 11175 |
| LED power [W] | 76 |
| Luminaire luminous flux [lm] | 8509 |
| Power of luminaire [W] | 83 |
| Luminaire's light efficiency [lm/W] | 102,5 |
| Color of the light [K] | 5700 |
| CRI | >70 |
| SDCM (LED sources) | 5 |
| Beam angle [°] | street light distribution |
| Protection against electric shock | I |
| Protection degree | IP66 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | -40 ÷ 40 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 6 (B10), 10 (B16), 10 (C10), 17 (C16) |

Mechanical data



| | |
|------------------|-----------------------------------|
| Assembly | mounted on poles |
| Material | aluminum |
| Color | RAL 9007 (dark gray) |
| Diffuser | hardened transparent glass |
| Impact resistant | IK09 |
| Weight [kg] | 5 |
| Dimensions [mm] | 628 x 266 x 99 |

A graph of light

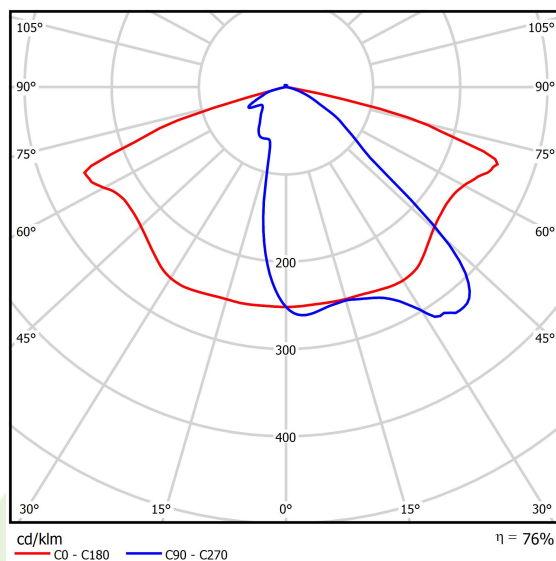

Accessories

Index 50ELR76/60

Name REDUKTOR R76/60x100




Index 27LBD-REDUCTION LBD

Name [A] STREETPARK pole reduction
LBD-S05S & LBD-S05M



Index 6BW-M8X40DIN914

Name WKREŃ M8x40 DIN 914 A2
DOCISKOWY NIERDZEWNY
IMBUS Z KOŃCEM STOZKOWYM
NA KLUCZ IMBUSOWY

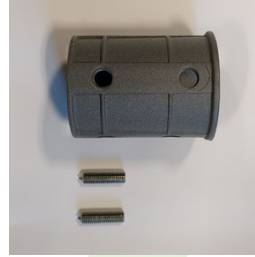

Index 27LBD-Holder Fi76

Name STREETPARK Holder Fi 76 mm,
RAL7021



Index 27LBD-HOLDER FI35

Name STREETPARK Holder Fi 35 mm
(arm Fi32) , RAL7021

