

Product: STREETPARK S LED COMPACT HO 5000 STREET-M E IP66 22 757**Index:** 19.3250.0002.22

Description

Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 60 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 5700 K.

Product information


Category	Compact
Family	STREETPARK LED COMPACT
Name	STREETPARK S LED COMPACT HO 5000 STREET-M E IP66 22 757
Index	19.3250.0002.22



Light and electrical data


Light source	LED
Luminous flux LED [lm]	5588
LED power [W]	38
Luminaire luminous flux [lm]	4255
Power of luminaire [W]	42
Luminaire's light efficiency [lm/W]	101,3
Color of the light [K]	5700
CRI	>70
SDCM (LED sources)	5
Beam angle [°]	street light distribution
Protection against electric shock	I
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	22 (B10), 35 (B16), 37 (C10), 59 (C16)

Mechanical data



Assembly	mounted on poles
Material	aluminum
Color	RAL 9007 (dark gray)
Diffuser	hardened transparent glass
Impact resistant	IK09
Weight [kg]	4,6
Dimensions [mm]	628 x 266 x 99

A graph of light

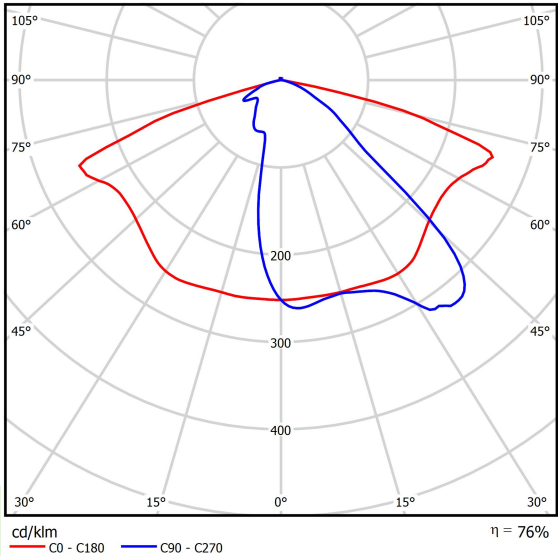

Accessories


Index	50ELR76/60
Name	REDUKTOR R76/60x100



Index	27LBD-REDUCTION LBD
Name	[A] STREETPARK pole reduction LBD-S05S & LBD-S05M



Index	6BW-M8X40DIN914
Name	M8x40 DIN 914 A2 NON-NEW PRESS-FIT CYLINDER WITH TAPER END FOR CYLINDER KEYS

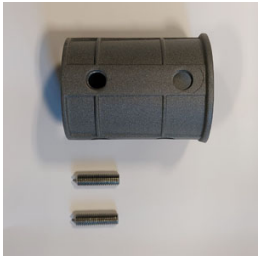

Index	27LBD-Holder Fi76
Name	STREETPARK Holder Fi 76 mm, RAL7021



Index	27LBD-HOLDER Fi35
Name	STREETPARK Holder Fi 35 mm (arm Fi32) , RAL7021

