

Product: STREETPARK MINI LED COMPACT HO 3500 STREET-M E IP66 21 740

Index: 19.3251.0001.34



Description

Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 48 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 4000 K. It is possible to program an autonomous multi-level or manual power reduction for specific customer needs by using a specialized power supply in the luminaire. The luminaires have overvoltage protection as standard based on the functionality of the power supplies.

Product information

Category	Compact
Family	STREETPARK MINI LED COMPACT
Name	STREETPARK MINI LED COMPACT HO 3500 STREET-M E IP66 21 740
Index	19.3251.0001.34




Light and electrical data


Light source	LED
Luminous flux LED [lm]	3280
LED power [W]	22
Luminaire luminous flux [lm]	2708
Power of luminaire [W]	25
Luminaire's light efficiency [lm/W]	108,3
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	5
Beam angle [°]	street light distribution
Protection against electric shock	I
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	39 (B10), 62 (B16), 65 (C10), 104 (C16)

Mechanical data


Assembly	mounted on poles
Material	aluminum
Color	RAL 9006 (grey)
Diffuser	hardened transparent glass
Impact resistant	IK09
Weight [kg]	2,81
Dimensions [mm]	507 x 209 x 144




A graph of light

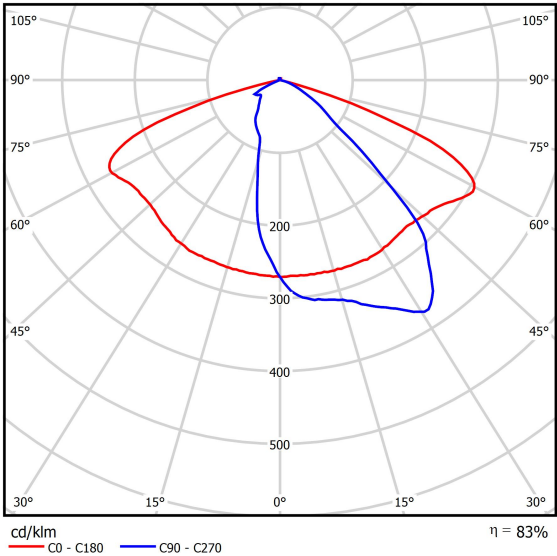

Accessories

Index	50EL60/48X100
Name	Redukcja słupa 60/48x100 do oprawy
	

Index	19.3100.0001.21
Name	Pole Mounting Bracket for STREETPARK Fi 50
	

Index	19.3100.0002.21
Name	Pole Mounting Bracket for STREETPARK Fi 60
