

**Product:** BACKPANEL LED 4800 MICRO-PRM EDD 34 IP20/44 830

**Index:** 19.3213.0015.34



## Description

Modern LED panel dedicated to be mounted on suspended modular ceilings, cardboard suspended ceilings (using adaptive frame), directly on the ceiling (using adaptive frame) or using adaptive frame and suspensions. Equipped with the highly efficient LED sources. Direct light distribution. Luminaire body made from steel sheet. PMMA opal diffuser. Colour of luminaire - white. CRI>80. Luminaire dedicated for the public use structure like offices, conference rooms, classrooms, lecture halls etc.

## Product information

|          |   |
|----------|---|
| Category | Recessed luminaires                             |
| Family   | BACKPANEL LED                                   |
| Name     | BACKPANEL LED 4800 MICRO-PRM EDD 34 IP20/44 830 |
| Index    | 19.3213.0015.34                                 |



## Light and electrical data


|   |  |
|---|--|
| Light source                              | LED                                    |
| Luminous flux LED [lm]                    | 4755                                   |
| LED power [W]                             | 29,8                                   |
| Luminaire luminous flux [lm]              | 4182                                   |
| Power of luminaire [W]                    | 33,6                                   |
| Luminaire's light efficiency [lm/W]       | 124,5                                  |
| Color of the light [K]                    | 3000                                   |
| CRI                                       | >80                                    |
| SDCM (LED sources)                        | 3                                      |
| Beam angle [°]                            | (C0-C180) / (C90-C270) - 88,8° / 88,2° |
| Photobiological risk class (IEC/EN 62471) | RG0                                    |
| Protection against electric shock         | II                                     |
| Protection degree                         | IP20/44                                |
| Voltage                                   | 220..240 V, 50..60 Hz                  |
| Lifetime of LED sources [h]               | 100000                                 |
| Lx/By                                     | L80/B10                                |
| Operating temperature range [°C]          | 5 ÷ 30                                 |
| Driver                                    | DIM DALI (EDD)                         |
| Circuit load capacity                     | 20 (B10), 30 (B16), 32 (C10), 52 (C16) |

## Mechanical data



|                  |   |
|------------------|---|
| Assembly         | mounted in module ceilings as well as plasterboard ceilings, directly mounted to ceiling construction and surface mounted on slings using accessories |
| Material         | steel sheet   |
| Color            | RAL 9016 (white)  |
| Diffuser         | Micro-PRM (micro-prismatic diffuser PMMA)   |
| Impact resistant | IK04  |
| Dimensions [mm]  | 596 x 596 x 34  |

## A graph of light

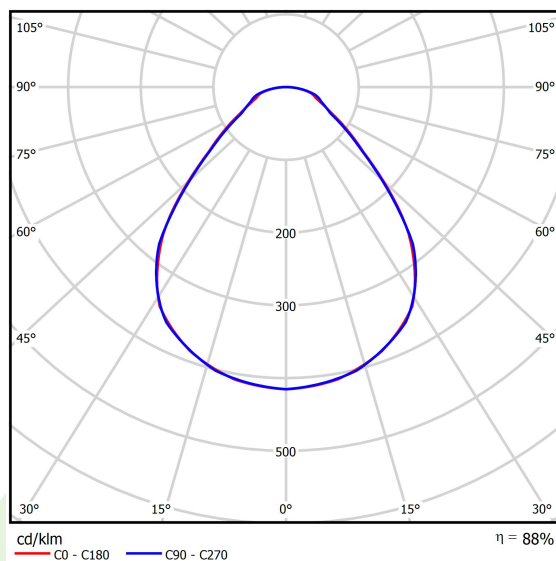

## Accessories


Index 19.3213.0079.34

Name BACKPANEL LED RECESSED  
ACCESSORIES 34 / 600X600



Index 19.3213.0073.34

Name BACKPANEL LED SURFACE  
ACCESSORIES 34 / 600X600




Index 19.3213.0076.34

Name BACKPANEL LED / RIM LED  
ACCESSORIES SET WITH  
SUSPENSION 1,5M / 600X600



Index 19.3213.0082.34

Name BACKPANEL COMPACT LED  
NASTROPOWA RAMKA  
ADAPTACYJNA 34 / 600X600



Index 19.3213.0083.34

Name BACKPANEL LED SURFACE  
ACCESSORIES BASIC 34 /  
600X600

