

**Product:** AGAT CLEAN-ECO LED COMPACT 8000 PLX E IP65 840 / 600X600

**Index:** 19.3236.0004.34



## Description

Luminaire designed to module suspended ceilings, equipped with the highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminaire recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information

Category	<b>Compact</b>
Family	<b>AGAT CLEAN-ECO LED COMPACT</b>
Name	<b>AGAT CLEAN-ECO LED COMPACT 8000 PLX E IP65 840 / 600X600</b>
Index	<b>19.3236.0004.34</b>



## Light and electrical data


Light source	<b>LED</b>
Luminous flux LED [lm]	<b>8236</b>
LED power [W]	<b>49</b>
Luminaire luminous flux [lm]	<b>6050</b>
Power of luminaire [W]	<b>55</b>
Luminaire's light efficiency [lm/W]	<b>110</b>
Color of the light [K]	<b>4000</b>
CRI	<b>&gt;80</b>
SDCM (LED sources)	<b>3</b>
Beam angle [°]	<b>(C0-C180) / (C90-C270) - 109,6° / 109,6°</b>
Photobiological risk class (IEC/EN 62471)	<b>RG0</b>
Protection against electric shock	<b>I</b>
Protection degree	<b>IP65</b>
Voltage	<b>220..240 V, 50..60 Hz</b>
Lifetime of LED sources [h]	<b>60000</b>
Lx/By	<b>L80/B10</b>
Operating temperature range [°C]	<b>5 ÷ 30</b>
Driver	<b>standard on/off (E)</b>
Power factor cos φ	<b>&gt;0,95</b>
Circuit load capacity	<b>12 (B10), 20 (B16), 21 (C10), 34 (C16)</b>

## Mechanical data



Assembly	<b>mounted in module ceilings</b>
Material	<b>steel sheet</b>
Color	<b>white</b>
Diffuser	<b>PLX (PMMA opal)</b>
Impact resistant	<b>IK04</b>
Weight [kg]	<b>6</b>
Dimensions [mm]	<b>595 x 595 x 75</b>

## A graph of light

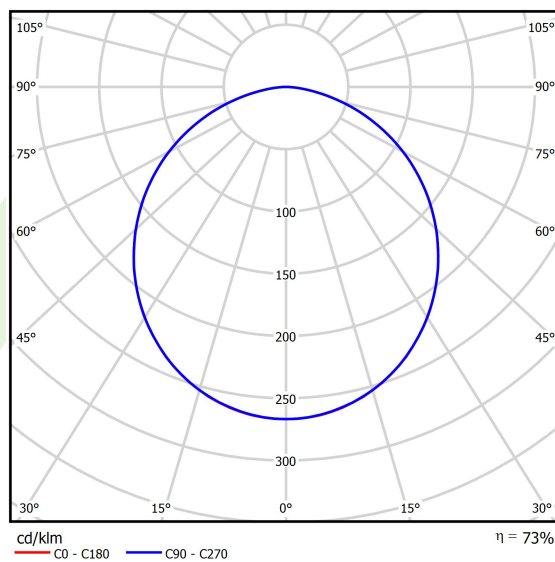

## Accessories

Index 2C1A7392-34R

Name EUROPANEL / BACKPANEL / RIM  
COMPACT LED RECESSED  
ACCESSORIES 34 / 600X600

