


Product: DOMINO CLEAN LOW UGR LED 8400 SH RASTER DAISY-BLACK-WIDE E 34 IP65 840 / 592X592

Index: 19.4057.1221.34

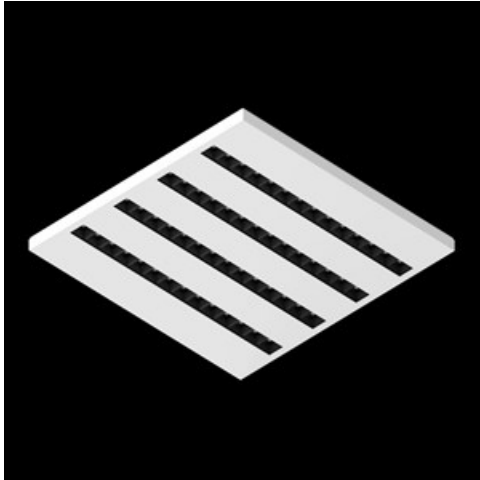

Description

LED luminaire dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminaire is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80. Level of tightness IP65.

Product information

| | |
|----------|--|
| Category | Clean luminaires - recessed |
| Family | DOMINO CLEAN LOW UGR LED |
| Name | DOMINO CLEAN LOW UGR LED 8400 SH RASTER DAISY-BLACK-WIDE E 34 IP65 840 / 592X592 |
| Index | 19.4057.1221.34 |



Light and electrical data

| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 8946 |
| LED power [W] | 45,2 |
| Luminaire luminous flux [lm] | 6806 |
| Power of luminaire [W] | 50,6 |
| Luminaire's light efficiency [lm/W] | 134,5 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 71,6° / 75,6° |
| Protection against electric shock | II |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (1) / 147000 (2) |
| Lx/By | L80/B10 (1) / L70/B10 (2) |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 15 (B10), 25 (B16), 24 (C10), 38 (C16) |

Mechanical data



| | |
|------------------|----------------------------|
| Assembly | mounted in module ceilings |
| Material | steel sheet |
| Color | RAL 9016 (white) |
| Diffuser | RASTER (anti-glare louvre) |
| Impact resistant | IK08 |
| Weight [kg] | 8,1 |
| Dimensions [mm] | 592 x 592 x 50 |

A graph of light

