

Product: RUBIN CLEAN LED 3900 MICRO-PRM EDD IP65 34 840 / 620X620MM

Index: 19.4064.1123.34



## Description

Surface mounted luminaire equipped in highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Diffusers and optical systems in aluminum frame. Luminaire recommended for: operating and treatment rooms, as well as intensive care units.

## Product information


Category	Clean luminaires - surface
Family	RUBIN CLEAN LED
Name	RUBIN CLEAN LED 3900 MICRO-PRM EDD IP65 34 840 / 620X620MM
Index	19.4064.1123.34
EAN	5902107083403



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	4008
LED power [W]	18,6
Luminaire luminous flux [lm]	3130
Power of luminaire [W]	20,8
Luminaire's light efficiency [lm/W]	150,5
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 89° / 89°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)

## Mechanical data

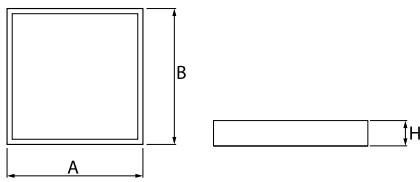

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
Impact resistant	IK04
Weight [kg]	7,2
Dimensions [mm]	620 x 620 x 78

## A graph of light

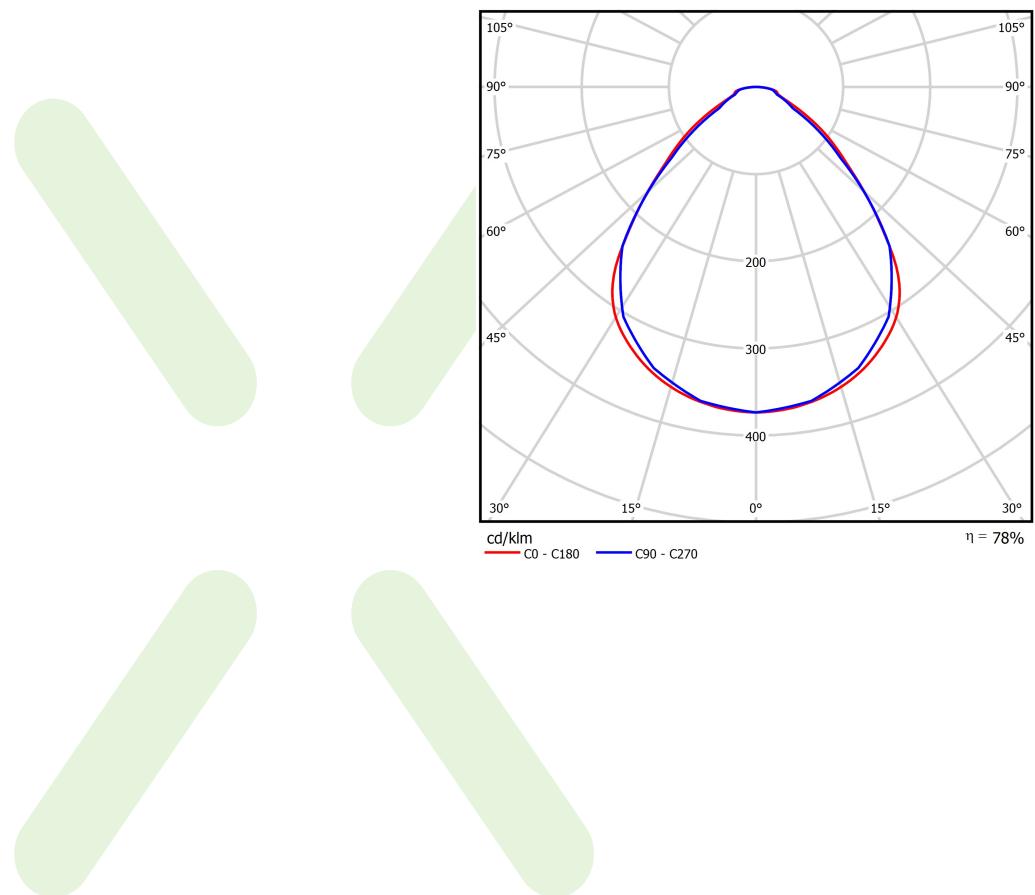

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026