

**Product:** AGAT CLEAN-ECO LED CRI95 7200 MICRO-PRM EDD IP65 34 930 / 600X600

**Index:** 19.4072.1233.34



## Description

LUXIONA Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Luminary designed to module suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information

|          |   |
|----------|---|
| Category | Clean luminaires CRI95  |
| Family   | AGAT CLEAN-ECO LED CRI95  |
| Name     | AGAT CLEAN-ECO LED CRI95 7200 MICRO-PRM EDD IP65 34 930 / 600X600 |
| Index    | 19.4072.1233.34   |



## Light and electrical data



|   |  |
|---|--|
| Light source                              | LED                                    |
| Luminous flux LED [lm]                    | 7952,6                                 |
| LED power [W]                             | 48,4                                   |
| Luminaire luminous flux [lm]              | 6529                                   |
| Power of luminaire [W]                    | 54,2                                   |
| Luminaire's light efficiency [lm/W]       | 120,5                                  |
| Color of the light [K]                    | 3000                                   |
| CRI                                       | >95                                    |
| SDCM (LED sources)                        | 3                                      |
| Beam angle [°]                            | (C0-C180) / (C90-C270) - 89° / 89°     |
| Photobiological risk class (IEC/EN 62471) | RG0                                    |
| Protection against electric shock         | I                                      |
| Protection degree                         | IP65                                   |
| Voltage                                   | 220..240 V, 50..60 Hz                  |
| Lifetime of LED sources [h]               | 100000                                 |
| Lx/By                                     | L80/B10                                |
| Operating temperature range [°C]          | 5 ÷ 30                                 |
| Driver                                    | DIM DALI (EDD)                         |
| Power factor cos φ                        | >0,95                                  |
| Circuit load capacity                     | 14 (B10), 23 (B16), 22 (C10), 35 (C16) |

**Mechanical data**



|                  |  |
|------------------|--|
| Assembly         | <b>mounted in module ceilings</b>                |
| Material         | <b>steel sheet</b>                               |
| Color            | <b>RAL 9016 (white)</b>                          |
| Diffuser         | <b>Micro-PRM (micro-prismatic diffuser PMMA)</b> |
| Impact resistant | <b>IK04</b>                                      |
| Dimensions [mm]  | <b>596 x 596 x 75</b>                            |

**A graph of light**

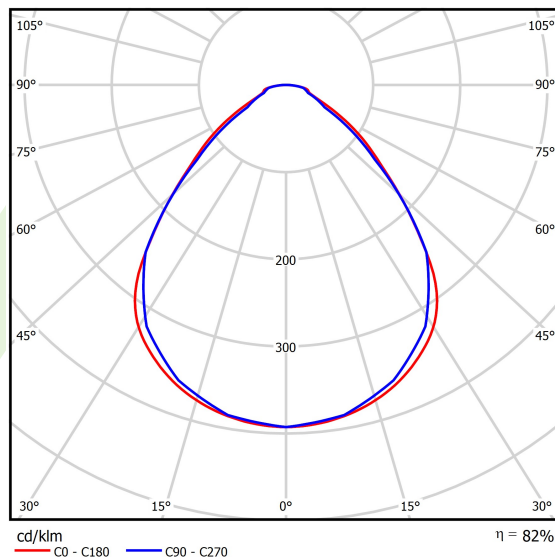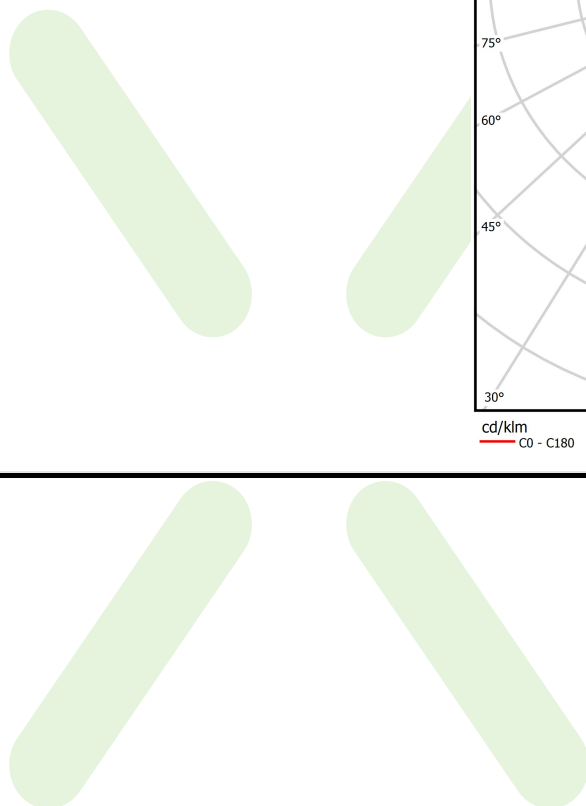

**Accessories**

Index 2C1A7392-34R

Name EUROPANEL / BACKPANEL / RIM  
COMPACT LED RECESSED  
ACCESSORIES 34 / 600X600

