

Product: AGAT CLEAN LED CRI95 10800 MICRO-PRM SH EDD IP65 34 940 / 1200X600

Index: 19.4073.4643.34



Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminaire recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Luminaire designed to module and gypsum and cardboard suspended ceilings, equipped with the highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Optical systems and diffusers mounted in an aluminum frame.

Product information

Category	Clean luminaires CRI95
Family	AGAT CLEAN LED CRI95
Name	AGAT CLEAN LED CRI95 10800 MICRO-PRM SH EDD IP65 34 940 / 1200X600
Index	19.4073.4643.34



Light and electrical data


Light source	LED
Luminous flux LED [lm]	11750
LED power [W]	72
Luminaire luminous flux [lm]	8459
Power of luminaire [W]	73,5
Luminaire's light efficiency [lm/W]	115,1
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 88° / 91,8°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	4 (B10), 6 (B16), 6 (C10), 10 (C16)

Mechanical data



Assembly	mounted in module ceilings, as well as plasterboard ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass)
Impact resistant	IK08
Weight [kg]	17,4
Dimensions [mm]	1196 x 596 x 76
Mounting hole [mm]	1180 x 580

A graph of light

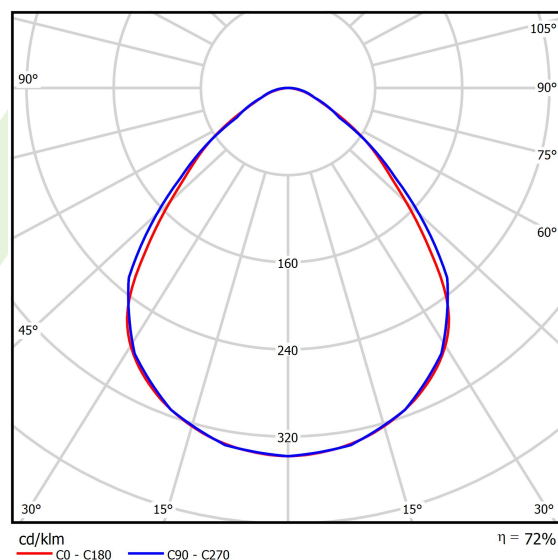

Accessories

Index 2M-X414LKPIPT5

Name Mounting clips set for plasterboard ceiling

