

**Product:** RUBIN CLEAN NO FRAME LED CRI95 5400 SHM E IP65 34 940 / 574X574MM

**Index:** 19.4076.2241.34



## Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminaire recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Surface mounted luminaire equipped in highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Its characteristic feature is lack of aluminum frame what allows to exclude the unwished-for contamination in clean rooms. There are no visible elements joining the diffuser and the luminaire body.

## Product information

|          |   |
|----------|---|
| Category | Clean luminaires CRI95  |
| Family   | RUBIN CLEAN NO FRAME LED CRI95                                    |
| Name     | RUBIN CLEAN NO FRAME LED CRI95 5400 SHM E IP65 34 940 / 574X574MM |
| Index    | 19.4076.2241.34   |
| EAN      | 5901867494672   |



## Light and electrical data


|   |  |
|---|--|
| Light source                              | LED                                      |
| Luminous flux LED [lm]                    | 6213                                     |
| LED power [W]                             | 36,3                                     |
| Luminaire luminous flux [lm]              | 4914                                     |
| Power of luminaire [W]                    | 40,7                                     |
| Luminaire's light efficiency [lm/W]       | 120,7                                    |
| Color of the light [K]                    | 4000                                     |
| CRI                                       | >95                                      |
| SDCM (LED sources)                        | 3  |
| Beam angle [°]                            | (C0-C180) / (C90-C270) - 109,6° / 109,6° |
| Photobiological risk class (IEC/EN 62471) | RG0                                      |
| Protection against electric shock         | I  |
| Protection degree                         | IP65                                     |
| Voltage                                   | 220..240 V, 50..60 Hz                    |
| Lifetime of LED sources [h]               | 100000                                   |
| Lx/By                                     | L80/B10                                  |
| Operating temperature range [°C]          | 5 ÷ 30                                   |
| Driver                                    | standard on/off (E)                      |
| Power factor cos φ                        | >0,95                                    |
| Circuit load capacity                     | 25 (B10), 40 (B16), 39 (C10), 62 (C16)   |

**Mechanical data**



|                  |                            |
|------------------|----------------------------|
| Assembly         | surface mounted on ceiling |
| Material         | steel sheet                |
| Color            | RAL 9016 (white)           |
| Diffuser         | SHM (hardened mat glass)   |
| Impact resistant | IK08                       |
| Dimensions [mm]  | 574 x 574 x 69             |

**A graph of light**

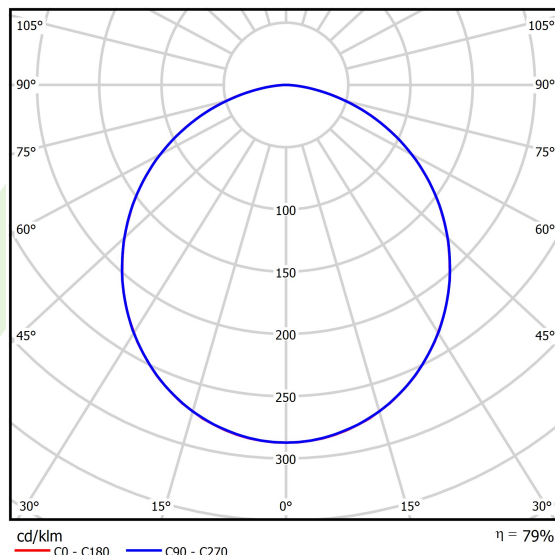

**Accessories**

Index 6BZBO60980

Name Handle for pane opening

