

Product: X-LINE SLIGHT L-DOWN LED 2600 MICRO-PRM EDD 21 840 / L-1134MM S-1,5M

Index: 19.4085.6323.21



#### **Description**

Linear luminaire with minimized width. Made of 34 mm wide and 68 mm high aluminum profile. Mounted on slings. Direct light distribution. The optical system is fulfilled by an aperture recessed into the body, facing the end cap. Available opal smooth or microprismatic diffuser made of PMMA. Luminaire in single version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Application of luminaires typically for offices, public spaces, community areas in multi-family buildings. There is the possibility of fitting a luminaire with a sound-absorbing housing.

#### **Product information**

Category	Surface mounted luminaires
Family	X-LINE SLIGHT LED
Name	X-LINE SLIGHT L-DOWN LED 2600 MICRO-PRM EDD 21 840 / L- 1134MM S-1,5M
Index	19.4085.6323.21













## Light and electrical data

Light source	LED	
Luminous flux LED [lm]	3018	
LED power [W]	13,8	
Luminaire luminous flux [lm]	2459,7	
Power of luminaire [W]	15,7	
Luminaire's light efficiency [lm/W]	156,7	
Color of the light [K]	4000	
CRI	>80	
SDCM (LED sources)	3	
Beam angle [°]	(C0-C180) / (C90-C270) - 86,2° / 111°	
Photobiological risk class (IEC/EN 62471)	RG0	
Protection against electric shock	I	
Protection degree	IP40	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	80000	
Lx/By	L80/B10	
Operating temperature range [°C]	5 ÷ 35	
Driver	DIM DALI (EDD)	
Power factor cos φ	>0,95	
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)	




$\mathbf{R}\mathbf{A}\mathbf{A}$	NAK	SIC	100	data
IVIT	-( -1	ıalı	III.di	data





Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9006 (grey)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
Impact resistant	IK04
Dimensions [mm]	1134 x 34 x 68

# A graph of light

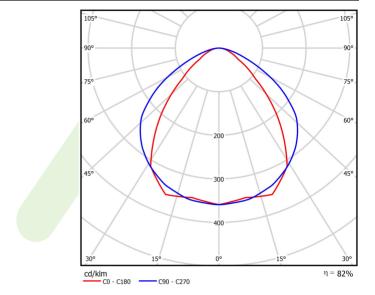

### **Accessories**

Index 19.4085.0004.00

Name X-LINE SLIGHT SOUND
ABSORBENT L-1134MM RED



Index 19.4085.0005.00

Name X-LINE SLIGHT SOUND
ABSORBENT L-1134MM BLUE



Index 19.4085.0006.00

Name X-LINE SLIGHT SOUND
ABSORBENT L-1134MM GREY

