


## Product: X-LINE SLIM L-DOWN LED 2600 MICRO-PRM EDD 04 840 / L-1138MM S-1,5M Index: 19.4089.4323.04



## Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser or lenses. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.


Product information	Category Surface mounted luminaires		
	Family X-LINE SLIM LED		
	Name X-LINE SLIM L-DOWN LED 2600 MICRO-PRM EDD 04 840 / L- 1138MM S-1,5M		
	Index 19.4089.4323.04		
	EAN <b>5902107383718</b>		
	$\overbrace{LED} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} $		
Light and electrical data	Light source LED		
	Luminous flux LED [Im] 2672		
	LED power [W] 12,4		
	Luminaire luminous flux [lm] 1977,3		
	Power of luminaire [W] 14,1		
	Luminaire's light efficiency [lm/W] 140,2		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C180) / (C90-C270) - 88,4° / 86°		
	Photobiological risk class (IEC/EN RG0 62471)		
	Protection against electric shock		
	Protection degree IP40		
	Voltage 220240 V, 5060 Hz		
	Lifetime of LED sources [h] 100000		
	Lx/By <b>L80/B10</b>		
	Operating temperature range [°C] 5 ÷ 35		
	Driver DIM DALI (EDD)		
	Power factor $\cos \varphi$ >0,95		
	Circuit load capacity 20 (B10), 31 (B16), 33 (C10), 53 (C16)		



Mechanical data	H B	Assembly Material Color Diffuser Impact resistant Weight [kg] Dimensions [mm]	surface mounted on slings aluminum RAL 9005 (black) Micro-PRM (micro-prismatic diffuser PMMA) IK04 2,2 1138 x 48 x 70
A graph of light			$ \begin{array}{c} 105^{\circ} & & & & \\ 90^{\circ} & & & & \\ 90^{\circ} & & & & \\ 75^{\circ} & & & & \\ 60^{\circ} & & & & \\ 00^{\circ} & & & & \\ 15^{\circ} & & & & \\ 00^{\circ} & & & & \\ 15^{\circ} & & & & \\ 00^{\circ} & & & & \\ 15^{\circ} & & & & \\ 00^{\circ} & & & & \\ 15^{\circ} & & & & \\ 00^{\circ} & & & & \\ 15^{\circ} & & & \\ 15^{\circ} & & & \\ 15^{\circ} & & & \\ 15^$




## Accessories

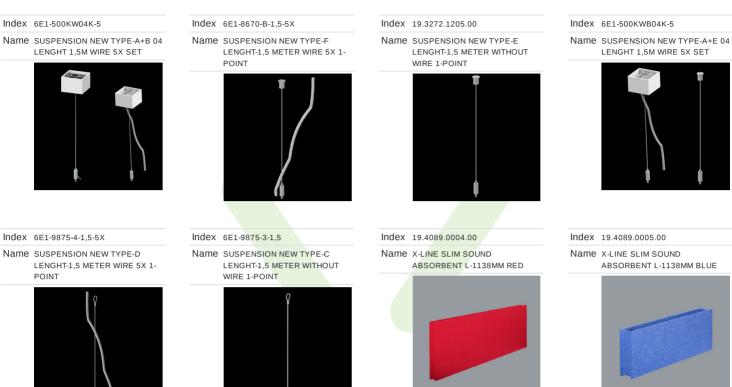

Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY









Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 22-08-2025