


Product: X-LINE SLIM L-DOWN LED 2600 PLX E 04 840 / L-1138MM S-1,5M Index: 19.4089.1321.04



Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser or lenses. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.

Category	Surface mounted luminaires
Family	X-LINE SLIM LED
Name	X-LINE SLIM L-DOWN LED 2600 PLX E 04 840 / L-1138MM S-1,5M
Index	19.4089.1321.04
EAN	5902107230371
	$\overbrace{LED} \bigoplus \bigoplus \bigoplus \bigoplus \bigoplus \bigoplus_{H_{40}} \bigoplus \bigoplus_{I_{40}} \bigoplus \bigoplus_{I_{40}} \bigoplus \bigoplus_{I_{40}} \bigoplus_{10} \bigoplus_{10$

Light and electrical data


Light source	LED	
Luminous flux LED [lm]	2672	
LED power [W]	12,4	
Luminaire luminous flux [lm]	1710,1	
Power of luminaire [W]	14,1	
Luminaire's light efficiency [lm/W]	121,3	
Color of the light [K]	4000	
CRI	>80	
SDCM (LED sources)	3	
Beam angle [°]	(C0-C180) / (C90-C270) - 96,4° / 90,2°	
Photobiological risk class (IEC/EN 62471)	RG0	
Protection against electric shock	I	
Protection degree	IP40	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	100000	
Lx/By	L80/B10	
Operating temperature range [°C]	5 ÷ 35	
Driver	standard on/off (E)	
Power factor cos φ	>0,95	
Circuit load capacity	25 (B10), 40 (B16), 39 (C10), 62 (C16)	



Mechanical data	∏tH B	Assembly Material Color	surface mounted on slings aluminum RAL 9005 (black)
l ₄ / ` ↓		Diffuser	PLX (PMMA opal)
		Impact resistant	IK04
		Weight [kg]	2,1
		Dimensions [mm]	1138 x 48 x 70
A graph of light			$105^{\circ} \\ 90^{\circ} \\ 75^{\circ} \\ 60^{\circ} \\ 100 \\ 15^{\circ} \\ 200 \\ 15^{\circ} \\ 200 \\ 45^{\circ} \\ 30^{\circ} \\ 15^{\circ} \\ 0^{\circ} \\ 15^{\circ} \\ 200 \\ 15^{\circ} \\ 30^{\circ} \\ 15^{\circ} \\ 15^{$



Accessories

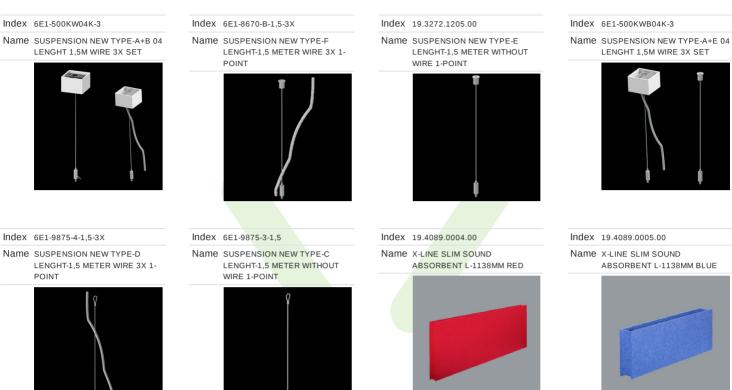

Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY







