

Product: X-LINE SLIM L-DOWN LED 5500 OPTICS-WIDE EDD 34 840 / L-1425MM S-1,5M

Index: 19.4090.2723.34



## **Description**

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser or lenses. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspensions.

### **Product information**

Category	Surface mounted luminaires
Family	X-LINE SLIM LED
Name	X-LINE SLIM L-DOWN LED 5500 OPTICS-WIDE EDD 34 840 / L-1425MM S-1,5M
Index	19.4090.2723.34
EAN	5902107364816
















## Light and electrical data

Light source	LED		
Luminous flux LED [lm]	5845		
LED power [W]	27,3		
Luminaire luminous flux [lm]	4851,4		
Power of luminaire [W]	31		
Luminaire's light efficiency [lm/W]	156,5		
Color of the light [K]	4000		
CRI	>80		
SDCM (LED sources)	3		
Beam angle [°]	(C0-C180) / (C90-C270) - 101,8° / 88,4°		
Photobiological risk class (IEC/EN 62471)	RG0		
Protection against electric shock	I		
Protection degree	IP40		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	100000		
Lx/By	L80/B10		
Operating temperature range [°C]	5 ÷ 35		
Driver	DIM DALI (EDD)		
Power factor cos φ	>0,95		
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)		



Mechanical data		Assembly	surface mounted on slings
		Material	aluminum
A	B B	Color	RAL 9016 (white)
		Diffuser	OPTICS (optical system based on lenses)
		Impact resistant	IK04
		Dimensions [mm]	1425 x 48 x 70

# A graph of light

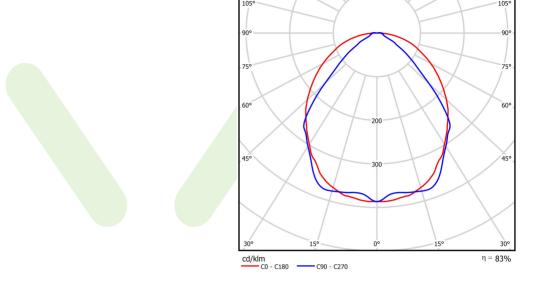





### **Accessories**

Index 6E1-500KW34K-5

Name SUSPENSION NEW TYPE-A+B 34 LENGHT 1,5M WIRE 5X SET



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT



Index 6E1-8670-B-1,5-5X

Name SUSPENSION NEW TYPE-F LENGHT-1,5 METER WIRE 5X 1-POINT



Index 6E1-9875-3-1,5

Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-500KWB24K-5

Name SUSPENSION NEW TYPE-A+E 24 LENGHT 1,5M WIRE 5X SET

