

Product: EUROPANEL LED 8000 MICRO-PRM E IP20/54 34 940 600X600 Index: 19.4099.5441.34



Description

Modern LED panel for installation in suspended ceilings or directly on the ceiling. Equipped with the highly efficient LED sources. Luminary body made from aluminum. PMMA opal diffuser. Colour of luminary - white. Luminary dedicated for the public use structure like offices, conference rooms, classrooms, lecture halls etc.

Product information


	Category	Recessed luminaires
	Family	EUROPANEL LED
	Name	EUROPANEL LED 8000 MICRO-PRM E IP20/54 34 940 600X600
	Index	19.4099.5441.34
	EAN	5902107319984
		LED ED IP20 IP54 KA A

Light and electrical data

Light source	LED
Luminous flux LED [lm]	7868
LED power [W]	65
Luminaire luminous flux [lm]	5956
Power of luminaire [W]	77
Luminaire's light efficiency [lm/W]	77,4
Color of the light [K]	4000
CRI	>90
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 93° / 82,6°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/54
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	70000 (1) / 56000 (2)
Lx/By	L70/B10 (1) / L80/B10 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor $\cos \phi$	>0,95
Circuit load capacity	22 (B10), 35 (B16), 37 (C10), 59 (C16)




η = **76%**

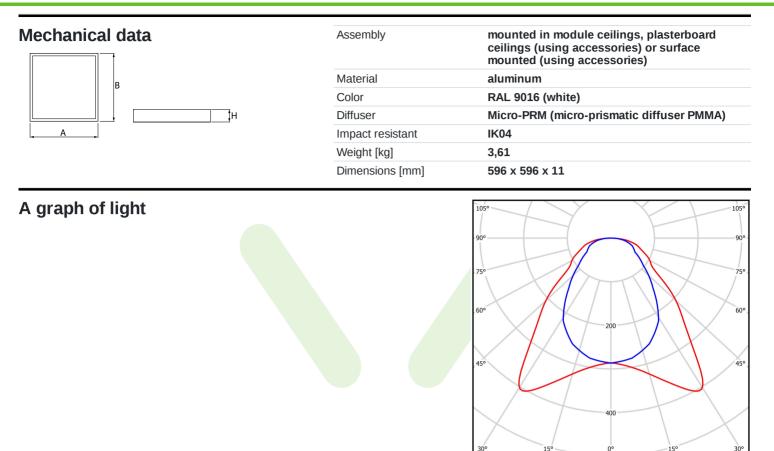

Accessories

- Index 2C1A7392-34R
- Name EUROPANEL / BACKPANEL / RIM COMPACT LED RECESSED ACCESSORIES 34 / 600X600



Index 01ARTLUNCNW6

Name EUROPANEL / RIM COMPACT LED SURFACE ACCESSORIES STANDARD 34 / 600X600



Index 01ARTBLUNCNW6

Name EUROPANEL / RIM COMPACT LED SURFACE ACCESSORIES BASIC 34 / 600X600x43mm

cd/klm _____ C0 - C180

C90 - C270

