

Product: ARTSHAPE OVAL LED LARGE FULL SUSPENDED 6000 PLX E 34 840 / S-1,5M

Index: 19.4010.3321.34



## **Description**

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on slings. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palete, the luminaries allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres.

#### **Product information**

Category	Architectural luminaires
Family	ARTSHAPE OVAL LED
Name	ARTSHAPE OVAL LED LARGE FULL SUSPENDED 6000 PLX E 34 840 / S-1,5M
Index	19.4010.3321.34
EAN	5902107211738

















### Light and electrical data

Light source	LED
Luminous flux LED [lm]	5940
LED power [W]	43
Luminaire luminous flux [lm]	4368
Power of luminaire [W]	50
Luminaire's light efficiency [lm/W]	87,4
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 111,2° / 114,2°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
•	
Protection degree	IP40
Protection degree Voltage	IP40 220240 V, 5060 Hz
Voltage	220240 V, 5060 Hz
Voltage Lifetime of LED sources [h]	220240 V, 5060 Hz 100000
Voltage Lifetime of LED sources [h] Lx/By	220240 V, 5060 Hz 100000 L80/B10
Voltage Lifetime of LED sources [h] Lx/By Operating temperature range [°C]	220240 V, 5060 Hz 100000 L80/B10 0 ÷ 30




## Mechanical data





Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	13,5
Dimensions [mm]	1170 x 250 x 85

# A graph of light

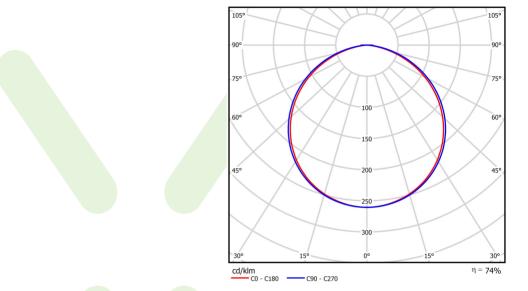

#### **Accessories**


Index 6E1-5000KW1P-3

Name SUSPENSION NEW TYPE-J 34 LENGHT 1,5M WIRE 3X 1-POINT



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-5000KW1P-Y-3

Name SUSPENSION NEW TYPE-K 34 LENGHT 1,5M WIRE 3X 1-POINT TYPE-Y



Index 6E1-8670-B-Y-1,5

Name SUSPENSION NEW TYPE-L LENGHT-1,5 METER WITHOUT WIRE 1-POINT TYPE-Y

