


Product: ARTSHAPE ROUND LED SMALL EDGE SUSPENDED 4000 PLX EDD 34 827-865 / S-1,5M

Index: 19.4012.1753.34

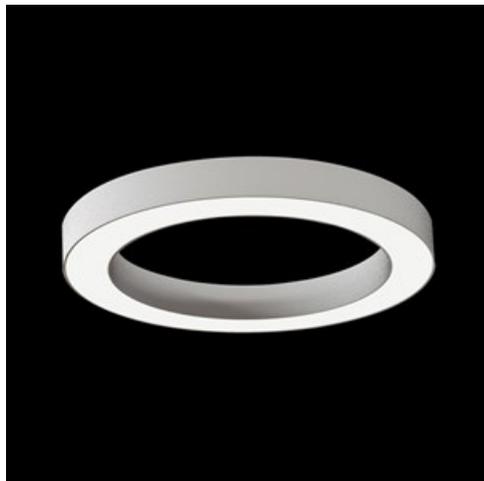

Description

Modernistic architectural luminaire in shapes of popular geometrical figures and fashionable design of simple form. The luminaire is adjusted to be mounted on slings. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminaire is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. LED modules adjusted to regulate the color temperature of light in the range from 2700 K to 6500 K. There is the possibility of fitting a luminaire with a sound-absorbing housing. On special request, it is possible to prepare an accessory (filling the centre with moss) on a fire-retardant board backing.

Product information



Category	Architectural luminaires
Family	ARTSHAPE ROUND LED
Name	ARTSHAPE ROUND LED SMALL EDGE SUSPENDED 4000 PLX EDD 34 827-865 / S-1,5M
Index	19.4012.1753.34
EAN	5902107220587



Light and electrical data



Light source	LED
Luminous flux LED [lm]	4320
LED power [W]	38
Luminaire luminous flux [lm]	2265
Power of luminaire [W]	42
Luminaire's light efficiency [lm/W]	53,9
Color of the light [K]	2700 ÷ 6500
CRI	>80
Beam angle [°]	(C0-C180) / (C90-C270) - 113,4° / 111,8°
Protection against electric shock	I
Protection degree	IP40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	0 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	13 (B10), 21 (B16), 22 (C10), 36 (C16)

Mechanical data



Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	Ø650 x 85

A graph of light

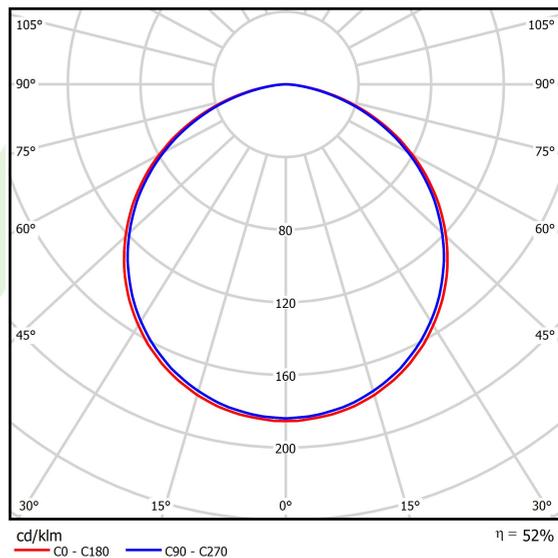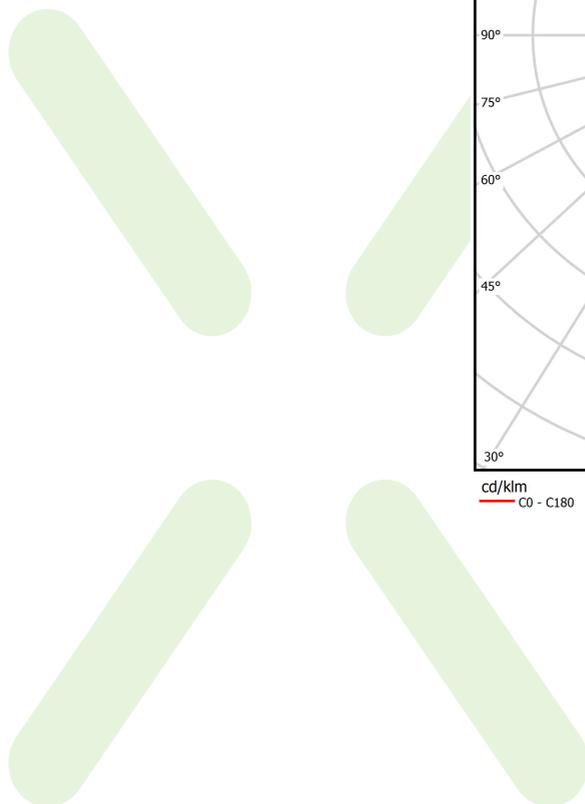

Accessories


Index 6E1-500OKW1P-5

Name SUSPENSION NEW TYPE-J 34
LENGHT 1,5M WIRE 5X 1-POINT



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E
LENGHT-1,5 METER WITHOUT
WIRE 1-POINT



Index 19.4012.1002.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT BLUE



Index 19.4012.1003.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT GREY



Index 19.4012.1001.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT RED



Index 19.4012.1007.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT VERSION-MOSS
LIGHT GREEN



Index 19.4012.1005.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT VERSION-S BLUE



Index 19.4012.1006.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT VERSION-S GREY



Index 19.4012.1004.00

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED SOUND
ABSORBENT VERSION-S RED



Index 91.4013.0050.04

Name ARTSHAPE ROUND LED SMALL
EDGE SUSPENDED 04 / SOUND
ABSORBENT GREY 650/1200MM
(compatible with the Artshape
Round Edge luminaire with an
outer diameter of 650 mm)

