

Product: AGAT CLEAN LED 5500 PLX E IP65 34 YELLOW MONO / 600X600

Index: 19.4026.2771.34



## Description

Luminary designed to module and gypsum and cardboard suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Optical systems and diffusers mounted in an aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information


Category	Clean luminaires - recessed
Family	AGAT CLEAN LED
Name	AGAT CLEAN LED 5500 PLX E IP65 34 YELLOW MONO / 600X600
Index	19.4026.2771.34
EAN	5902107140298



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	5500
LED power [W]	130
Luminaire luminous flux [lm]	4127
Power of luminaire [W]	145
Luminaire's light efficiency [lm/W]	28,5
Color of the light [K]	yellow colour (dominant wavelength $\lambda_p=592$ nm)
Beam angle [°]	(C0-C180) / (C90-C270) - 105° / 104,8°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Circuit load capacity	5 (B10), 8 (B16), 8 (C10), 13 (C16)

## Mechanical data

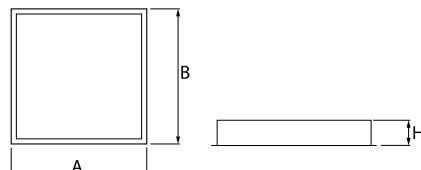

Assembly	mounted in module ceilings, as well as plasterboard ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 76
Mounting hole [mm]	580 x 580

## A graph of light

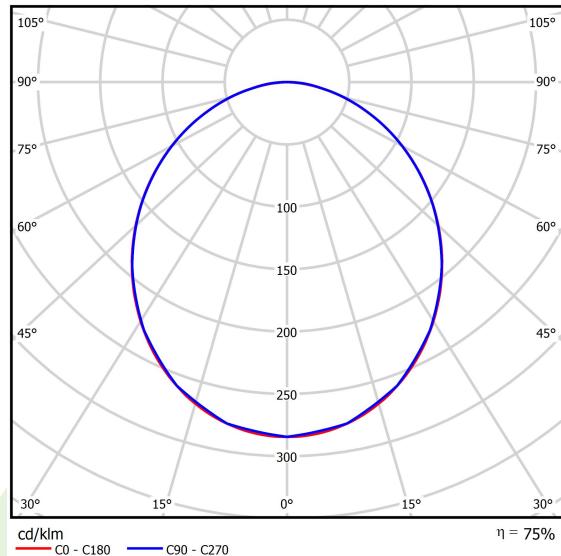

## Accessories

Index 2M-X414LKPIPT5

Name Mounting clips set for plasterboard ceiling



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 13-01-2026