

**Product:** AGAT CLEAN LED 10400 SHM EDD IP65 34 840 / 1200X600

**Index:** 19.4028.3223.34



## Description

Luminaire designed to module and gypsum and cardboard suspended ceilings, equipped with the highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Optical systems and diffusers mounted in an aluminum frame. Luminaire recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information

Category	Clean luminaires - recessed
Family	AGAT CLEAN LED
Name	AGAT CLEAN LED 10400 SHM EDD IP65 34 840 / 1200X600
Index	19.4028.3223.34
EAN	5902107107666



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	10686
LED power [W]	49,6
Luminaire luminous flux [lm]	8453
Power of luminaire [W]	55,6
Luminaire's light efficiency [lm/W]	152
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 23 (B16), 22 (C10), 35 (C16)

**Mechanical data**



Assembly	<b>mounted in module ceilings, as well as plasterboard ceilings</b>
Material	<b>steel sheet</b>
Color	<b>RAL 9016 (white)</b>
Diffuser	<b>SHM (hardened mat glass)</b>
Impact resistant	<b>IK08</b>
Weight [kg]	<b>13,7</b>
Dimensions [mm]	<b>1196 x 596 x 76</b>
Mounting hole [mm]	<b>1180 x 580</b>

**A graph of light**

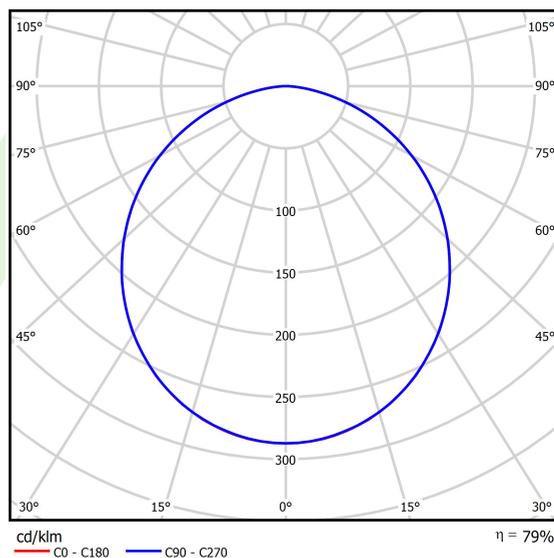

**Accessories**

Index 2M-X414LKPIPT5  
 Name Mounting clips set for plasterboard ceiling

