

Product: BERYL NEW LED K-2/L4 3600 E IP20/44 33 840

Index: 19.4032.7221.33



## Description

Aluminum cast housing. This technology significantly increases possibility of application of particular luminaire due to lower ceiling load since additional cooling radiator is not required. Beryl New LED K has higher efficiency and efficiency than the previous version. Luminaire is dedicated for prestigious interiors such as hotels, banks and offices of higher standard. Owing to the newest components and renowned producers of LEDs applied it was possible to build such luminaires which save energy consumption comparing with traditional solutions. The luminaire has the ability to adjust the optics in two planes (in the vertical axis by 359° and to the left and right 15°). Note: the color of the frame and housing has a slightly different shade than the color of the inner reflector cover.

## Product information



Category	<b>Recessed luminaires</b>
Family	<b>BERYL NEW LED K/L4</b>
Name	<b>BERYL NEW LED K-2/L4 3600 E IP20/44 33 840</b>
Index	<b>19.4032.7221.33</b>
EAN	<b>5902107199166</b>



## Light and electrical data



Light source	<b>LED</b>
Luminous flux LED [lm]	<b>17220</b>
LED power [W]	<b>90</b>
Luminaire luminous flux [lm]	<b>12441</b>
Power of luminaire [W]	<b>102</b>
Luminaire's light efficiency [lm/W]	<b>122</b>
Color of the light [K]	<b>4000</b>
CRI	<b>80</b>
SDCM (LED sources)	<b>2</b>
Beam angle [°]	<b>(C0-C180) / (C90-C270) - 39° / 39,2°</b>
Protection against electric shock	<b>I</b>
Protection degree	<b>IP20/44</b>
Voltage	<b>220..240 V, 50..60 Hz</b>
Lifetime of LED sources [h]	<b>86000 (1) / 100000 (2) / 100000 (3)</b>
Lx/By	<b>L90/B10 (1) / L80/B10 (2) / L70/B10 (3)</b>
Operating temperature range [°C]	<b>5 ÷ 30</b>
Driver	<b>standard on/off (E)</b>
Power factor cos φ	<b>&gt;0,95</b>
Circuit load capacity	<b>9 (B10), 15 (B16), 16 (C10), 26 (C16)</b>

## Mechanical data



Assembly	<b>mounted in module ceilings, as well as plasterboard ceilings</b>
Material	<b>aluminum</b>
Color	<b>RAL 9010 (white)</b>
Diffuser	<b>transparent glass</b>
Impact resistant	<b>IK04</b>
Dimensions [mm]	<b>650 x 164 x 137</b>
Mounting hole [mm]	<b>620 x 145</b>

## A graph of light

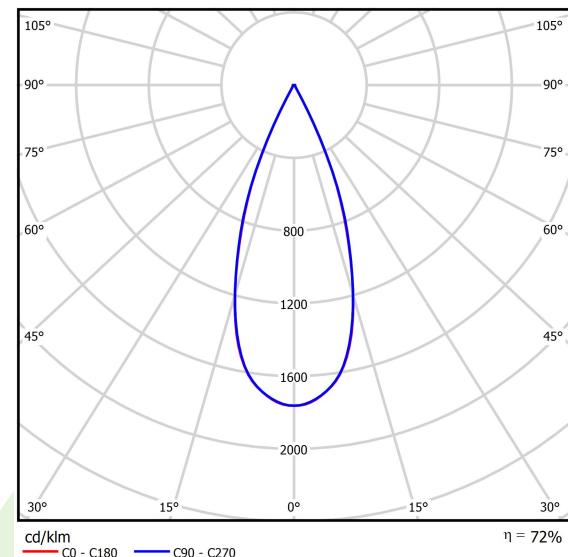

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026