

Product: X-LINE LED 5500 PLX EDD 24 830 LINE-1EP / L-1407MM

Index: 19.4171.3113.24



Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information

Category	Surface mounted luminaires
Family	X-LINE LED LINE
Name	X-LINE LED 5500 PLX EDD 24 830 LINE-1EP / L-1407MM
Index	19.4171.3113.24
EAN	5902107075248
















Light and electrical data

Light source	LED
Luminous flux LED [lm]	5526
LED power [W]	29
Luminaire luminous flux [lm]	3684
Power of luminaire [W]	30,5
Luminaire's light efficiency [lm/W]	120,8
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109° / 107,2°
Photobiological risk class (IEC/EN	RG0
62471)	
Protection against electric shock	I
,	I IP44
Protection against electric shock	•
Protection against electric shock Protection degree	IP44
Protection against electric shock Protection degree Voltage	IP44 220240 V, 5060 Hz
Protection against electric shock Protection degree Voltage Lifetime of LED sources [h]	IP44 220240 V, 5060 Hz 100000 (1) / 147000 (2)
Protection against electric shock Protection degree Voltage Lifetime of LED sources [h] Lx/By	IP44 220240 V, 5060 Hz 100000 (1) / 147000 (2) L80/B10 (1) / L70/B50 (2)
Protection against electric shock Protection degree Voltage Lifetime of LED sources [h] Lx/By Operating temperature range [°C]	IP44 220240 V, 5060 Hz 100000 (1) / 147000 (2) L80/B10 (1) / L70/B50 (2) 5 ÷ 30



Mechanical data	□ t _H	Assembly	directly mounted to ceiling construction or surface mounted on slings
Δ	B	Material	aluminum
A		Color	anodised aluminum
		Diffuser	PLX (PMMA opal)
		Impact resistant	IK04
		Dimensions [mm]	1407 x 63 x 74

A graph of light

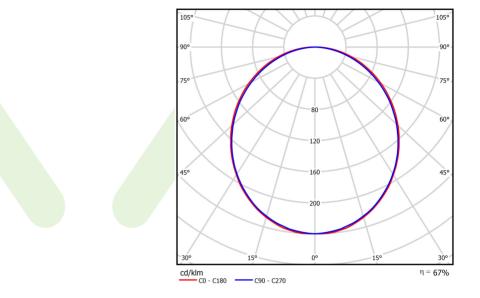







Accessories


Index 6E1-500KWAN1P-5

Name SUSPENSION NEW TYPE-A 24 LENGHT 1,5M WIRE 5X 1-POINT



Index 6E1-9875-3-1,5

Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-500KWAN1P-B

Name SUSPENSION NEW TYPE-B 24
LENGHT 1,5M WITHOUT WIRE 1POINT




Index 0E1XLL-SLED

Name X-LINE Clamp for line luminaires



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT

