

**Product:** X-LINE G/K LED 5200 MICRO-PRM EDD 24 840 LINE-1S / CONNECTOR TYPE-X 600/600/600/600

**Index:** 19.4175.1223.24



## Description

The group of X-line luminaires is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaires may be joined with special connectors providing great freedom in arranging elements of the system and its functionality.

## Product information

|          |   |
|----------|---|
| Category | Recessed luminaires   |
| Family   | X-LINE G/K LED CONNECTOR X  |
| Name     | X-LINE G/K LED 5200 MICRO-PRM EDD 24 840 LINE-1S / CONNECTOR TYPE-X 600/600/600/600 |
| Index    | 19.4175.1223.24   |
| EAN      | 5902107078119   |




## Light and electrical data

|                                     |  |
|-------------------------------------|--|
| Light source                        | LED                                    |
| Luminous flux LED [lm]              | 5234                                   |
| LED power [W]                       | 26,6                                   |
| Luminaire luminous flux [lm]        | 3942                                   |
| Power of luminaire [W]              | 28,2                                   |
| Luminaire's light efficiency [lm/W] | 139,8                                  |
| Color of the light [K]              | 4000                                   |
| CRI                                 | >80                                    |
| SDCM (LED sources)                  | 3                                      |
| Beam angle [°]                      | (C0-C180) / (C90-C270) - 82,8° / 97,2° |
| Protection against electric shock   | I                                      |
| Protection degree                   | IP20/44                                |
| Voltage                             | 220..240 V, 50..60 Hz                  |
| Lifetime of LED sources [h]         | 100000 (1) / 147000 (2)                |
| Lx/By                               | L80/B10 (1) / L70/B50 (2)              |
| Operating temperature range [°C]    | 5 ÷ 30                                 |
| Driver                              | DIM DALI (EDD)                         |
| Power factor cos φ                  | >0,95                                  |
| Circuit load capacity               | 17 (B10), 28 (B16), 26 (C10), 41 (C16) |

## Mechanical data

|                    |   |
|--------------------|---|
| Assembly           | mounted in plasterboard ceilings          |
| Material           | aluminum                                  |
| Color              | anodised aluminum                         |
| Diffuser           | Micro-PRM (micro-prismatic diffuser PMMA) |
| Impact resistant   | IK04                                      |
| Dimensions [mm]    | 1126 x 1126 x 134                         |
| Mounting hole [mm] | 1126 x 1126 x 70                          |

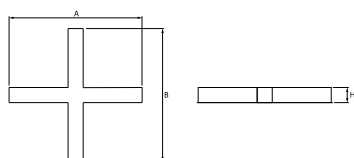

A graph of light



Accessories

|       |                                  |
|-------|----------------------------------|
| Index | 0E1XLL-SLED                      |
| Name  | X-LINE Clamp for line luminaires |

