

Product: X-LINE LED 3300 MICRO-PRM E 24 840 LINE-S / CONNECTOR TYPE-LE 600/300 Index: 19.4176.6321.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires		
		CRO-PRM E 24 840 LINE-S / CONNECTOR	
	Index 19.4176.6321.24		
	EAN 5902107100582		
Light and electrical data	Light source	LED	
	Luminous flux LED [lm]	3436	
	LED power [W]	17,4	
	Luminaire luminous flux [lm]	2588	
	Power of luminaire [W]	19,2	
	Luminaire's light efficiency [lm/W] 134,8	
	Color of the light [K]	4000	
	CRI	>80	
	SDCM (LED sources)	3	
	Beam angle [°]	(C0-C180) / (C90-C270) - 82,8° / 97,2°	
	Protection against electric shock	I	
	Protection degree	IP44	
	Voltage	220240 V, 5060 Hz	
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)	
	Lx/By	L80/B10 (1) / L70/B50 (2)	
	Operating temperature range [°C	C] 5 ÷ 30	
	Driver	standard on/off (E)	
	Power factor $\cos \varphi$	>0,95	
	Circuit load capacity	22 (B10), 34 (B16), 33 (C10), 54 (C16)	
Mechanical data	Assembly dir su	ectly mounted to ceiling construction or rface mounted on slings	
	Material alu	iminum	
	Color an	odised aluminum	
	Diffuser Mic	cro-PRM (micro-prismatic diffuser PMMA)	
	Impact resistant IKC		
	Dimensions [mm] 593	3 x 313 x 71	

A graph of light

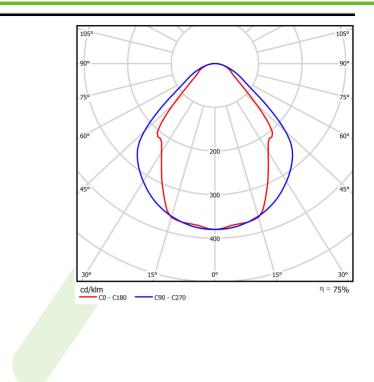



Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT

Index 0E1XLL-SLED Name X-LINE Clamp for line luminaires



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT

