

Product: X-LINE LED 6600 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-TC 600/600/600 Index: 19.4177.4311.24



Description


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted lumina	Category Surface mounted luminaires	
	Family X-LINE LED CONNECTOR	FamilyX-LINE LED CONNECTOR TNameX-LINE LED 6600 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-TC 600/600/600	
	Index 19.4177.4311.24		
Light and electrical data	Light source	LED	
	Luminous flux LED [lm]	6608	
	LED power [W]	33,7	
	Luminaire luminous flux [lm]	4977	
	Power of luminaire [W]	35,3	
	Luminaire's light efficiency [lm/W]	141	
	Color of the light [K]	3000	
	CRI	>80	
	SDCM (LED sources)	3	
	Beam angle [°]	(C0-C180) / (C90-C270) - 82,8° / 97,2°	
	Protection against electric shock	I	
	Protection degree	IP44	
	Voltage	220240 V, 5060 Hz	
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)	
	Lx/By	L80/B10 (1) / L70/B50 (2)	
	Operating temperature range [°C]	5 ÷ 30	
	Driver	standard on/off (E)	
	Power factor $\cos \phi$	>0,95	
	Circuit load capacity	16 (B10), 25 (B16), 26(C10), 42 (C16)	
Mechanical data	Assembly directl surfac	y mounted to ceiling construction or e mounted on slings	
	Material alumin	ium	
	H Color anodis	anodised aluminum	
	Diffuser Micro-	user Micro-PRM (micro-prismatic diffuser PMMA)	
	Impact resistant IK04		
	Dimensions [mm] 1126 x	593 x 71	

Dimensions [mm]

1126 x 593 x 71

A graph of light

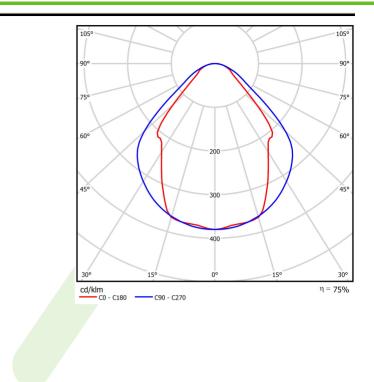



Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT

Index 0E1XLL-SLED Name X-LINE Clamp for line luminaires



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 30-06-2025