

Product: X-LINE LED 6600 MICRO-PRM EDD 24 840 LINE-1S / CONNECTOR TYPE-TC 600/600/600 Index: 19.4177.4323.24



Description


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires		
	Family X-LINE LED CONNECTOR T		
	Name X-LINE LED 6600 MICRO-PRM EDD 24 840 LINE-1S / CONNECTO TYPE-TC 600/600/600		
	Index 19.4177.4323.24		
Light and electrical data	Light source LED		
	Luminous flux LED [lm] 6848		
	LED power [W] 33,7		
	Luminaire luminous flux [Im] 5158		
	Power of luminaire [W] 35,3		
	Luminaire's light efficiency [lm/W] 146,1		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C180) / (C90-C270) - 82,8° / 97		
	Protection against electric shock I		
	Protection degree IP44		
	Voltage 220240 V, 5060 Hz		
	Lifetime of LED sources [h] 100000 (1) / 147000 (2)		
	Lx/By L80/B10 (1) / L70/B50 (2)		
	Operating temperature range [°C] 5 ÷ 30		
	Driver DIM DALI (EDD)		
	Power factor cos φ >0,95		
	Circuit load capacity 14 (B10), 23 (B16), 22 (C10), 35	5 (C16)	
Mechanical data	Assembly directly mounted to ceiling construction surface mounted on slings	on or	
	Material aluminum	aluminum	
	Color anodised aluminum	anodised aluminum	
	Diffuser Micro-PRM (micro-prismatic diffuser P	Micro-PRM (micro-prismatic diffuser PMMA)	
	Impact resistant IK04		
	Dimensions [mm] 1126 x 593 x 71		

Dimensions [mm]

1126 x 593 x 71

A graph of light

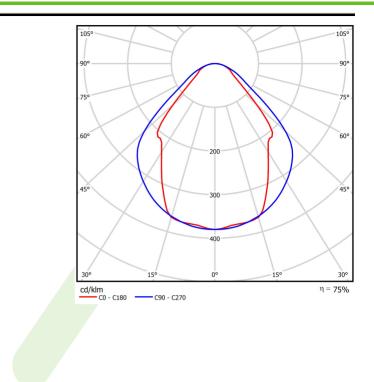




Accessories












Index 0E1XLL-SLED
Name X-LINE Clamp for line luminaires



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 30-06-2025