


Product: X-LINE LED 5200 MICRO-PRM EDD 24 840 LINE-1S / CONNECTOR TYPE-X 600/600/600/600 Index: 19.4178.1223.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires	
	Family X-LINE LED CONNECTOR X Name X-LINE LED 5200 MICRO-PRM EDD 24 840 LINE-1S / CONNECTO TYPE-X 600/600/600	
	$\overbrace{LED} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \end{array}{} \end{array}{\end{array}}$	
	Light and electrical data	Light source LED
Luminous flux LED [Im] 5234		
LED power [W] 26,6		
Luminaire luminous flux [lm] 3942		
Power of luminaire [W] 28,2		
Luminaire's light efficiency [lm/W] 139,8		
Color of the light [K] 4000		
CRI >80		
SDCM (LED sources) 3		
Beam angle [°] (C0-C180) / (C90-C270) - 82,8° / 9		97,2°
Protection against electric shock		
Protection degree IP44		
Voltage 220240 V, 5060 Hz		
Lifetime of LED sources [h] 100000 (1) / 147000 (2)		
Lx/By L80/B10 (1) / L70/B50 (2)		
Operating temperature range [°C] 5 ÷ 30		
Driver DIM DALI (EDD)		
Power factor $\cos \varphi$ >0,95		
Circuit load capacity 17 (B10), 28 (B16), 26 (C10), 41 (C		C16)
Mechanical data	Assembly directly mounted to ceiling construction surface mounted on slings	۱or
	Material aluminum	
	Color anodised aluminum	
	Diffuser Micro-PRM (micro-prismatic diffuser PMI	MA)
	Impact resistant IK04	
	Dimensions [mm] 1126 x 1126 x 71	

A graph of light

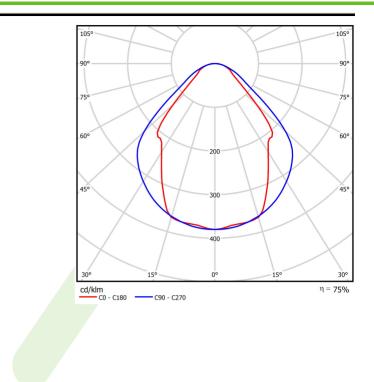




Accessories












Index 0E1XLL-SLED
Name X-LINE Clamp for line luminaires



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 30-06-2025