

Product: X-LINE WALL UP OR DOWN LED 3300 PLX E 24 840 / L-852MM

Index: 19.4188.5221.24



## Description

Luminary to be mounted on wall. Its body made from anodized aluminum profile. Luminary equipped with highly efficient LED sources. Its no frame diffuser is made from white polymethyl methacrylate with a great light transparency. Luminary is characterized by high illumination efficacy. Purpose: offices, conference rooms, corridors, halls, etc.

## Product information


Category	Surface mounted luminaires
Family	X-LINE WALL UP OR DOWN LED
Name	X-LINE WALL UP OR DOWN LED 3300 PLX E 24 840 / L-852MM
Index	19.4188.5221.24
EAN	5902107181291



## Light and electrical data



Light source	LED
Luminous flux LED [lm]	3436
LED power [W]	17,4
Luminaire luminous flux [lm]	2290
Power of luminaire [W]	19,2
Luminaire's light efficiency [lm/W]	119,3
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109° / 107,2°
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)

## Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	anodised aluminum
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	2,15
Dimensions [mm]	852 x 63 x 74

## A graph of light

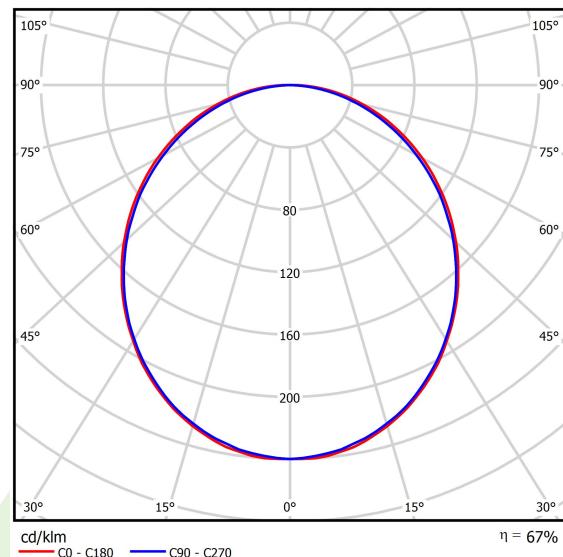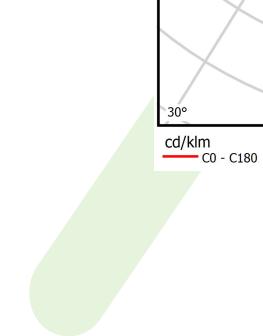

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-02-2026