


**Product:** X-LINE LED COMPACT 2600 PLX E 24 830 / L-1412MM

**Index:** 19.4189.4211.24

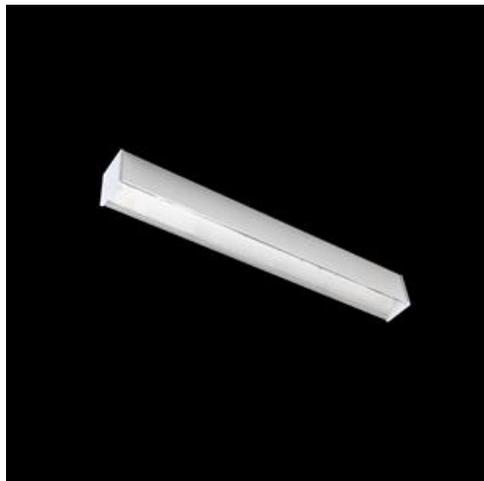

## Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. In the family of X-LINE LED fittings modules of renowned brands are applied.

## Product information

Category	<b>Compact</b>
Family	<b>X-LINE LED COMPACT</b>
Name	<b>X-LINE LED COMPACT 2600 PLX E 24 830 / L-1412MM</b>
Index	<b>19.4189.4211.24</b>
EAN	<b>5902107327415</b>



## Light and electrical data



Light source	<b>LED</b>
Luminous flux LED [lm]	<b>2590</b>
LED power [W]	<b>14,7</b>
Luminaire luminous flux [lm]	<b>1726</b>
Power of luminaire [W]	<b>16,5</b>
Luminaire's light efficiency [lm/W]	<b>104,6</b>
Color of the light [K]	<b>3000</b>
CRI	<b>&gt;80</b>
SDCM (LED sources)	<b>3</b>
Beam angle [°]	<b>(C0-C180) / (C90-C270) - 109° / 107,2°</b>
Protection against electric shock	<b>I</b>
Protection degree	<b>IP44</b>
Voltage	<b>220..240 V, 50..60 Hz</b>
Lifetime of LED sources [h]	<b>60000</b>
Lx/By	<b>L80/B10</b>
Operating temperature range [°C]	<b>5 ÷ 30</b>
Driver	<b>standard on/off (E)</b>
Power factor cos φ	<b>&gt;0,95</b>
Circuit load capacity	<b>22 (B10), 34 (B16), 33 (C10), 54 (C16)</b>

**Mechanical data**



Assembly	<b>directly mounted to ceiling construction or surface mounted on slings using accessories</b>
Material	<b>aluminum</b>
Color	<b>anodised aluminum</b>
Diffuser	<b>PLX (PMMA opal)</b>
Impact resistant	<b>IK04</b>
Weight [kg]	<b>3,5</b>
Dimensions [mm]	<b>1412 x 63 x 74</b>

**A graph of light**

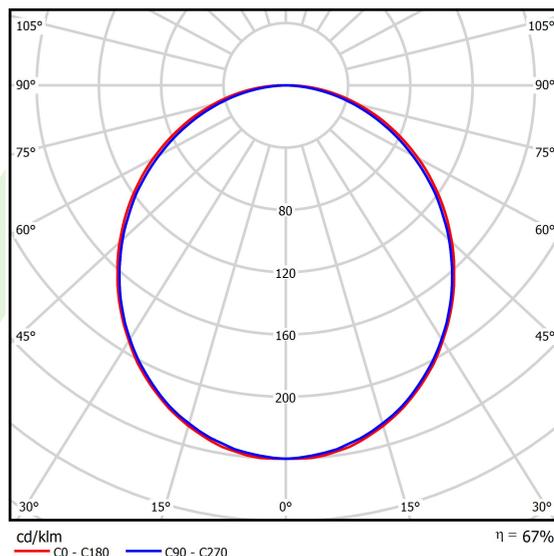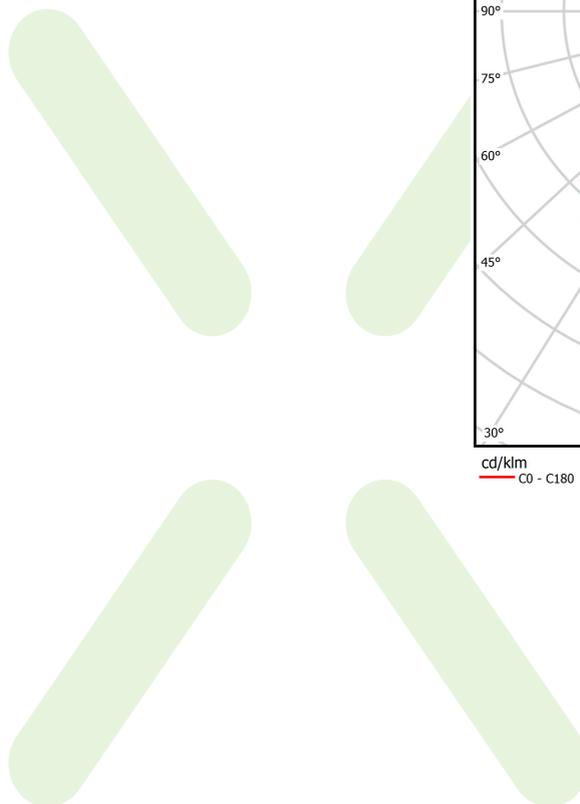

## Accessories


Index 6E1-500KWANK-3

Name SUSPENSION NEW TYPE-A+B 24  
LENGHT 1,5M WIRE 3X SET



Index 6E1-8670-B-1,5-3X

Name SUSPENSION NEW TYPE-F  
LENGHT-1,5 METER WIRE 3X 1-  
POINT



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E  
LENGHT-1,5 METER WITHOUT  
WIRE 1-POINT



Index 19.3272.0704.24

Name SUSPENSION NEW TYPE-A+E 24  
LENGHT 1,5M WIRE 3X SET



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D  
LENGHT-1,5 METER WIRE 3X 1-  
POINT



Index 6E1-9875-3-1,5

Name SUSPENSION NEW TYPE-C  
LENGHT-1,5 METER WITHOUT  
WIRE 1-POINT

