


Product: X-LINE SLIM L-DOWN LED COMPACT 4000 MICRO-PRM EDD 24 840 / L-1138MM S-1,5M Index: 19.4190.1123.24



Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED Compact, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim Compact uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim Compact luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.


Product information	Category Compact		
	Family X-LINE SLIM LED COMPACT	D-PRM EDD 24	
	Name X-LINE SLIM L-DOWN LED COMPACT 4000 MICRO-PRM EDD 2 840 / L-1138MM S-1,5M		
	Index 19.4190.1123.24		
	EAN 5902107325473		
	$\overbrace{LED} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \end{array}{\end{array}}$	Ø	
Light and electrical data	Light source LED		
	Luminous flux LED [Im] 4458,5		
	LED power [W] 22,2		
	Luminaire luminous flux [Im] 3299,3		
	Power of luminaire [W] 25,2		
	Luminaire's light efficiency [lm/W] 130,9		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C180) / (C90-C270) - 88,4° / 8	86°	
	Photobiological risk class (IEC/EN RG0 62471)		
	Protection against electric shock		
	Protection degree IP40		
	Voltage 220240 V, 5060 Hz		
	Lifetime of LED sources [h] 90000		
	Lx/By L80/B10		
	Operating temperature range [°C] 5 ÷ 35		
	Driver DIM DALI (EDD)		
	Power factor $\cos \phi$ >0,95		
	Circuit load capacity 17 (B10), 28 (B16), 26 (C10), 41 (C16)		



Mechanical data	⊟tH B	Assembly Material Color Diffuser Impact resistant Weight [kg] Dimensions [mm]	surface mounted on slings aluminum anodised aluminum Micro-PRM (micro-prismatic diffuser PMMA) IK04 2,1 1138 x 48 x 70
A graph of light			$105^{\circ} \qquad 105^{\circ} \qquad 90^{\circ} \qquad$



Accessories

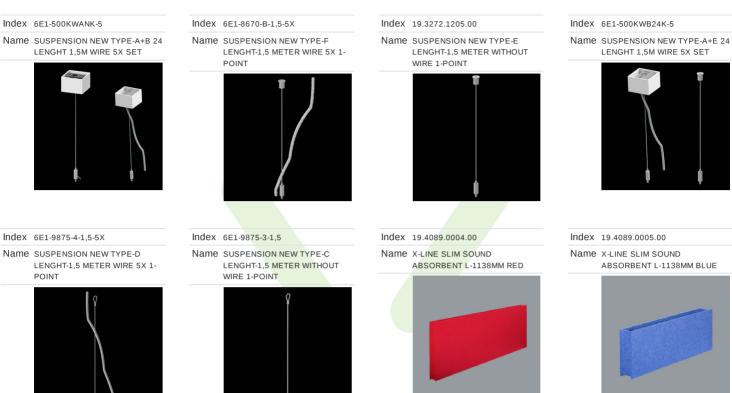


Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY









Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 22-08-2025