


## Product: X-LINE SLIM L-DOWN LED COMPACT 4000 PLX E 04 840 / L-1138MM S-1,5M Index: 19.4190.1221.04



## Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED Compact, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim Compact uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim Compact luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.


Product information	Category Compact		
	Family X-LINE SLIM LED COMPACT		
	Name X-LINE SLIM L-DOWN LED COMPACT 4000 PLX E 04 840 / L- 1138MM S-1,5M		
	Index 19.4190.1221.04		
	EAN <b>5902107327255</b>		
	$\overbrace{LED} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} \textcircled{\bullet} $		
Light and electrical data	Light source LED		
	Luminous flux LED [Im] 4458,5		
	LED power [W] 22,2		
	Luminaire luminous flux [lm] 2853,4		
	Power of luminaire [W] 25,2		
	Luminaire's light efficiency [lm/W] 113,2		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C180) / (C90-C270) - 96,4° / 90,2°		
	Photobiological risk class (IEC/EN RG0 62471)		
	Protection against electric shock I		
	Protection degree IP40		
	Voltage 220240 V, 5060 Hz		
	Lifetime of LED sources [h] 90000		
	Lx/By <b>L80/B10</b>		
	Operating temperature range $[^{\circ}C]$ 5 ÷ 35		
	Driver standard on/off (E)		
	Power factor $\cos \varphi$ >0,95		
	Circuit load capacity 25 (B10), 40 (B16), 39 (C10), 62 (C16)		



Mechanical data		Assembly	surface mounted on slings
	<u> </u> н	Material	aluminum
A	B	Color	RAL 9005 (black)
		Diffuser	PLX (PMMA opal)
		Impact resistant	IK04
		Weight [kg]	2,05
		Dimensions [mm]	1138 x 48 x 70
A graph of light			$ \begin{array}{c} 105^{\circ} & & & & & & & & & \\ 90^{\circ} & & & & & & & & & \\ 90^{\circ} & & & & & & & & & \\ 75^{\circ} & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & & & \\ 60^{\circ} & & & & & & & & & & & & & & & & & & &$



## Accessories

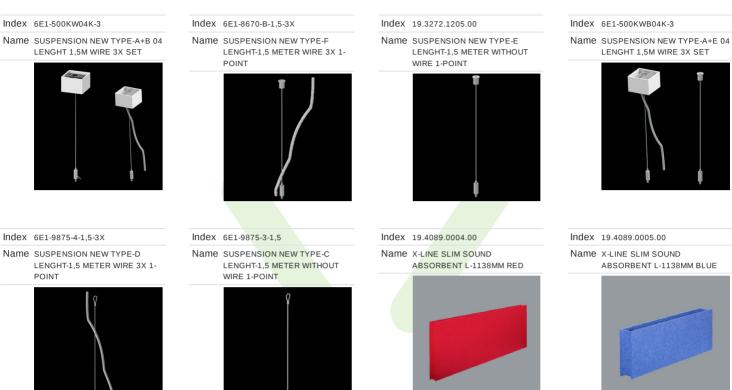

Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY







