

Product: X-LINE SLIM L-DOWN LED COMPACT 4000 PLX EDD 24 840 / L-1138MM S-1,5M Index: 19.4190.1223.24



Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED Compact, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim Compact uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim Compact luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.


Product information		Category Compact		
		Family X-LINE SLIM LED COMPACT		
		Name X-LINE SLIM L-DOWN LED COMPACT 4000 PLX EDD 24 840 / L- 1138MM S-1,5M		
		Index 19.4190.1223.24		
		EAN 5902107332730		
		$\overbrace{LED} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \end{array}{\end{array}}$		
Light and electrical data		Light source LED		
		Luminous flux LED [Im] 4458,5		
		LED power [W] 22,2		
		Luminaire luminous flux [lm] 2853,4		
		Power of luminaire [W] 25,2		
		Luminaire's light efficiency [lm/W] 113,2		
		Color of the light [K] 4000		
		CRI >80		
		SDCM (LED sources) 3		
		Beam angle [°] (C0-C180) / (C90-C270) - 96,4° / 90,2°		
		Photobiological risk class (IEC/EN RG0 62471)		
		Protection against electric shock I		
		Protection degree IP40		
		Voltage 220240 V, 5060 Hz		
		Lifetime of LED sources [h] 90000		
		Lx/By L80/B10		
		Operating temperature range [°C] 5 ÷ 35		
		Driver DIM DALI (EDD)		
		Power factor $\cos \phi$ >0,95		
		Circuit load capacity 17 (B10), 28 (B16), 26 (C10), 41 (C16)		



Mechanical data	∏tH ⊨⊷i B	Assembly Material Color Diffuser Impact resistant Weight [kg] Dimensions [mm]	surface mounted on slings aluminum anodised aluminum PLX (PMMA opal) IK04 2,1 1138 x 48 x 70
A graph of light			l_{10}^{10}



Accessories

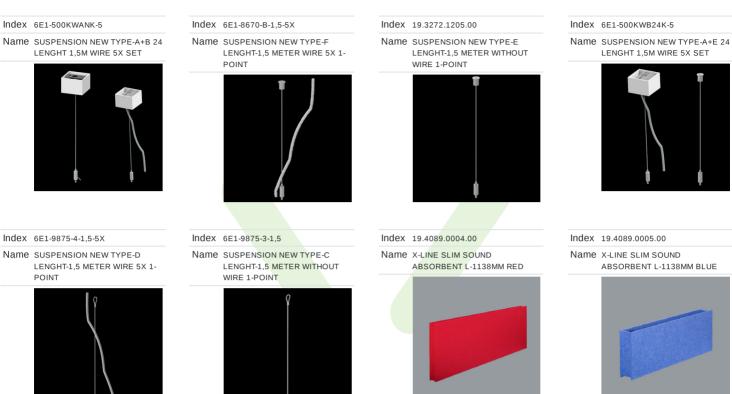

Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY





