


Product: X-LINE SLIM L-DOWN LED COMPACT 4000 PLX EDD 34 840 / L-1138MM S-1,5M Index: 19.4190.1223.34



Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED Compact, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim Compact uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim Compact luminaire is designed for mounting on suspensions. There is the possibility of fitting a luminaire with a sound-absorbing housing.


Product information	Category Compact		
	Family X-LINE SLIM LED COMPACT		
	Name X-LINE SLIM L-DOWN LED COMPACT 4000 PLX EDD 34 840 / L- 1138MM S-1,5M		
	Index 19.4190.1223.34		
	EAN 5902107343293		
	$\overbrace{LED} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \end{array}{\end{array}}$		
Light and electrical data	Light source LED		
	Luminous flux LED [Im] 4458,5		
	LED power [W] 22,2		
	Luminaire luminous flux [Im] 2853,4		
	Power of luminaire [W] 25,2		
	Luminaire's light efficiency [lm/W] 113,2		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C180) / (C90-C270) - 96,4° / 90,2°		
	Photobiological risk class (IEC/EN RG0 62471)		
	Protection against electric shock I		
	Protection degree IP40		
	Voltage 220240 V, 5060 Hz		
	Lifetime of LED sources [h] 90000		
	Lx/By L80/B10		
	Operating temperature range [°C] 5 ÷ 35		
	Driver DIM DALI (EDD)		
	Power factor $\cos \varphi$ >0,95		
	Circuit load capacity 17 (B10), 28 (B16), 26 (C10), 41 (C16)		



Mechanical data	<u> </u>	Assembly Material	surface mounted on slings aluminum
		Color	RAL 9016 (white)
	В	Diffuser	PLX (PMMA opal)
		Impact resistant	IK04
		Weight [kg]	2,1
		Dimensions [mm]	1138 x 48 x 70
A graph of light			105° 90° 90°
			75° 60° 100 60°
			45°
			$\frac{250}{30^{\circ}}$



Accessories

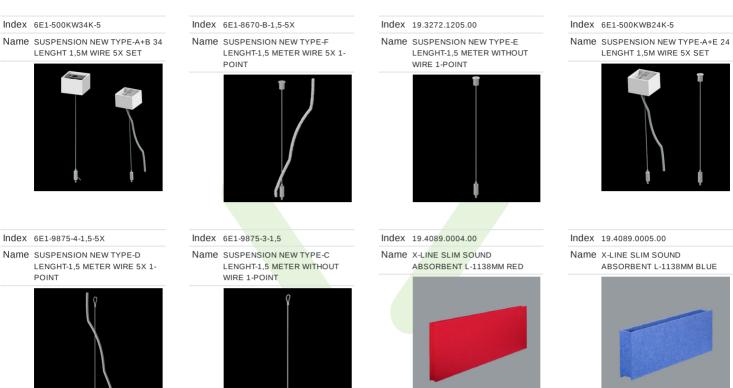

Index 19.4089.0006.00 Name X-LINE SLIM SOUND

ABSORBENT L-1138MM GREY







Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 09-09-2025