

Product: FASAD WALL LED 2200 SH SYM FLOOD E 83 IP65 830 / L-619mm

Index: 19.4193.3111.83



## Description

Weather proof powder painted aluminum housing. Clear stainless steel diffuser. Luminaire is equipped with adjustment allowing proper light flux operation. LED panels are applied as light sources. Recommended for walls and solid base. Fasad Wall LED is dedicated to illuminate walls of architectural objects.

## Product information


Category	Outdoor luminaires
Family	FASAD WALL LED
Name	FASAD WALL LED 2200 SH SYM FLOOD E 83 IP65 830 / L-619mm
Index	19.4193.3111.83
EAN	5902023877452



## Light and electrical data



Light source	LED
Luminous flux LED [lm]	2203
LED power [W]	11,7
Luminaire luminous flux [lm]	2068
Power of luminaire [W]	12,6
Luminaire's light efficiency [lm/W]	164,1
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 66° / 95°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	45 (B10), 75 (B16), 45 (C10), 75 (C16)

## Mechanical data

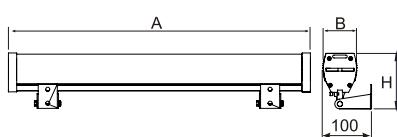

Assembly	mounted on wall
Material	aluminum
Color	RAL 7015 (grey)
Diffuser	SH (transparent hardened glass)
Impact resistant	IK09
Weight [kg]	2,11
Dimensions [mm]	619 x 62 x 114

## A graph of light

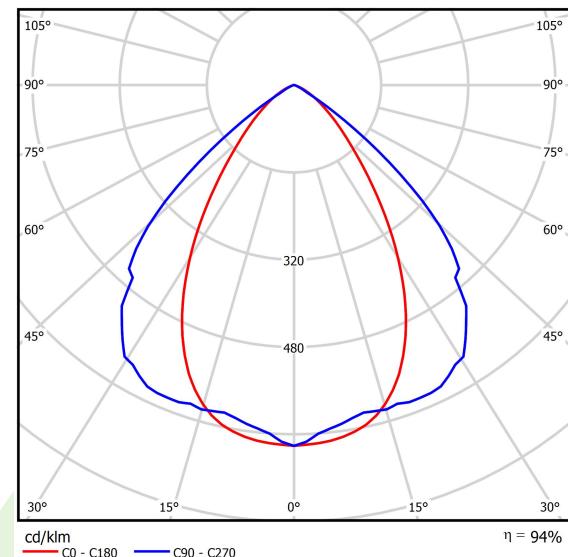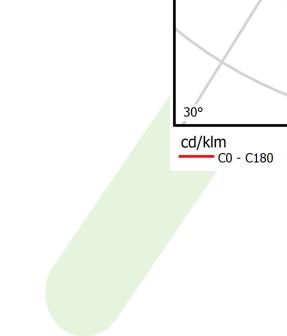

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-02-2026