


Product: DOMINO LOW UGR LED 1800 RASTER DAISY-BLACK-WIDE EDD 34 840 / 250x250MM RECESSED

Index: 19.4100.7723.34

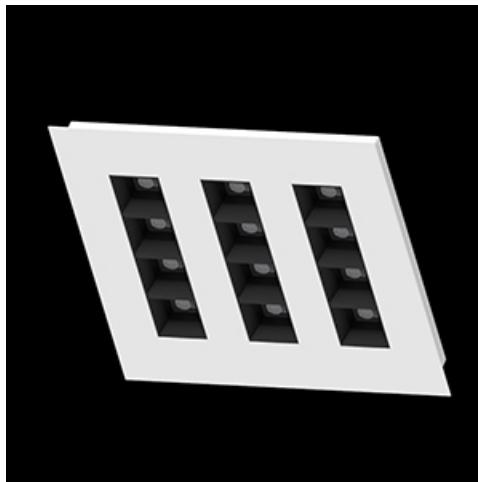

Description

LED luminaire dedicated to be mounted on cardboard suspended ceilings. Equipped with highly efficient LED light sources. The Domino LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminaire is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80.

Product information


Category	Recessed luminaires
Family	DOMINO LOW UGR LED
Name	DOMINO LOW UGR LED 1800 RASTER DAISY-BLACK-WIDE EDD 34 840 / 250x250MM RECESSED
Index	19.4100.7723.34
EAN	5902107302528



Light and electrical data



Light source	LED
Luminous flux LED [lm]	2185,5
LED power [W]	11,6
Luminaire luminous flux [lm]	1814
Power of luminaire [W]	13
Luminaire's light efficiency [lm/W]	139,5
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 72,6° / 74,4°
Protection against electric shock	II
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	72000 (1) 72000 (2)
Lx/By	L80/B10 (1) / L70/B10 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	20 (B10), 30 (B16), 32 (C10), 52 (C16)

Mechanical data

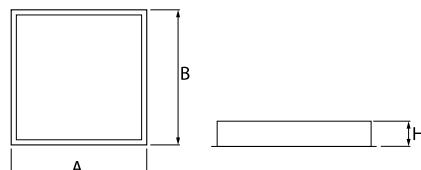

Assembly	mounted in plasterboard ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	RASTER (anti-glare louver)
Impact resistant	IK04
Weight [kg]	0,93
Dimensions [mm]	250 x 250 x 43
Mounting hole [mm]	241 x 241

A graph of light

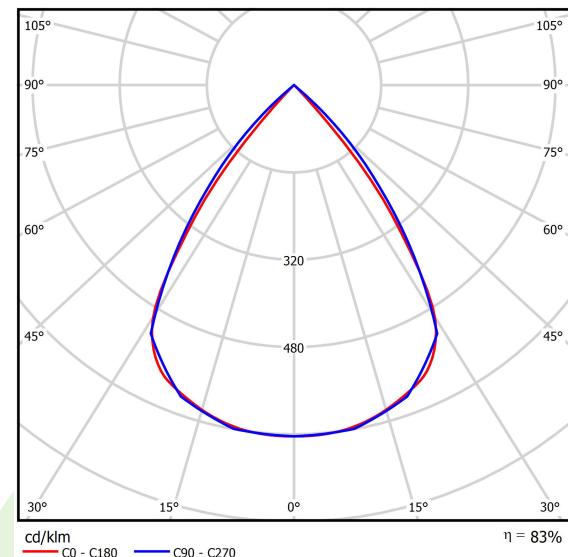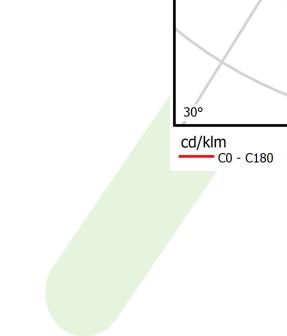

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026