

Product: DOMINO LOW UGR LED 4200 RASTER DAISY-BLACK-WIDE E 34 840 / 1196X296MM Index: 19.4100.3221.34




Description

LED luminary dedicated to be mounted on suspended modular ceilings, cardboard suspended ceilings (using mounting clips or adaptive frame), directly on the ceiling (using ceiling sheet) or using ceiling sheet and suspensions. Equipped with highly efficient LED light sources. The Domino LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminary is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80.

| Product information | | Category Recessed luminaires | | | |
|---------------------------|------|------------------------------|--|------------------|--|
| | | Family DOMINO LOW UGR LED | | | |
| | Ν | | 00000000000000000000000000000000000000 | | 4200 RASTER DAISY-BLACK-WIDE E 34 |
| | li | ndex 1 | 9.4100.3221.3 | 4 | |
| | E | AN 5 | 902107281793 | 3 | |
| | | | CE | | |
| Light and electrical data | L | ight source | e | | LED |
| Light and cloothoal data | | • | ux LED [lm] | | 4474 |
| | | ED power | | | 22,6 |
| | | - | uminous flux [Ir | n] | 3713 |
| | | | minaire [W] | | 25,3 |
| | | | light efficiency | (Im/WI | 146,8 |
| | | Color of the | • • | | 4000 |
| | | CRI | 0 1 1 | | >80 |
| | S | SDCM (LED |) sources) | | 3 |
| | | Beam angle | | | (C0-C180) / (C90-C270) - 72,6° / 74,4° |
| | | Protection a | against electric | shock | II |
| | F | Protection of | legree | | IP20 |
| | N | /oltage | | | 220240 V, 5060 Hz |
| | L | ifetime of I | LED sources [h | 1] | 100000 (1) / 147000 (2) |
| | L | x/By | | | L80/B10 (1) / L70/B10 (2) |
| | | Operating to | emperature rai | nge [°C] | 5 ÷ 30 |
| | C | Driver | | | standard on/off (E) |
| | F | Power facto | or cos φ | | >0,95 |
| | C | Circuit load | capacity | | 31 (B10), 49 (B16), 51 (C10), 82 (C16) |
| Mechanical data | | Assembly | | plaste ceilin | ted in module ceilings as well as erboard ceilings, directly mounted to g construction and surface mounted on s using accessories |
| р | Ν | /laterial | | steel | sheet |
| | ‡н с | Color | | RAL 9 | 0016 (white) |
| A | | Diffuser | | RAST | ER (anti-glare louver) |
| | | mpact resis | stant | IK04 | |
| | | Veight [kg] | | 4,9 | |
| | | Dimensions | ; [mm] | 1196 | x 296 x 23 |

A graph of light

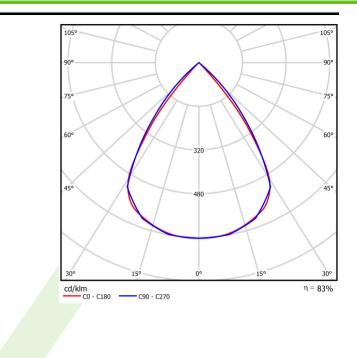






Accessories






Index 19.3200.0008.34



Index 19.3272.0101.34

Name SUSPENSION NEW TYPE-G+H



Index 6E1-500KW341P-3Y

Name SUSPENSION NEW TYPE-G 34 LENGHT 1,5M WIRE 3X 1-POINT



Index 6E1-8670-B-Y-1,5 Name SUSPENSION NEW TYPE-L

