

Product: DOMINO LOW UGR LED 8400 RASTER DAISY-BLACK-WIDE EDD 34 840 / 1196X296MM Index: 19.4100.3423.34




Description

LED luminary dedicated to be mounted on suspended modular ceilings, cardboard suspended ceilings (using mounting clips or adaptive frame), directly on the ceiling (using ceiling sheet) or using ceiling sheet and suspensions. Equipped with highly efficient LED light sources. The Domino LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminary is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80.

Product information		Category Recessed lumin	aires	
		Family DOMINO LOW UGR LED		
		Name DOMINO LOW U 34 840 / 1196X29	GR LED 8400 RASTER DAISY-BLACK-WIDE EDD 96MM	
		Index 19.4100.3423.34		
		EAN 5902107281892		
		CE		
Light and electrical data		Light source	LED	
		Luminous flux LED [lm]	8946	
		LED power [W]	45,2	
		Luminaire luminous flux [lm]		
		Power of luminaire [W]	50,6	
		Luminaire's light efficiency [
		Color of the light [K]	4000	
		CRI	>80	
		SDCM (LED sources)	3	
		Beam angle [°]	(C0-C180) / (C90-C270) - 72,6° / 74,4°	
		Protection against electric s		
		Protection degree	IP20	
		Voltage	220240 V, 5060 Hz	
		Lifetime of LED sources [h]	100000 (1) / 147000 (2)	
		Lx/By	L80/B10 (1) / L70/B10 (2)	
		Operating temperature rang	ge [°C] 5 ÷ 30	
		Driver	DIM DALI (EDD)	
		Power factor $\cos \phi$	>0,95	
		Circuit load capacity	12 (B10), 20 (B16), 20 (C10), 32 (C16)	
Mechanical data		Assembly	mounted in module ceilings as well as plasterboard ceilings, directly mounted to ceiling construction and surface mounted on slings using accessories	
		Material	steel sheet	
	H	Color	RAL 9016 (white)	
	—	Diffuser	RASTER (anti-glare louver)	
		Impact resistant	IK04	
		Weight [kg]	4,1	
		Dimensions [mm]	1196 x 296 x 23	

A graph of light

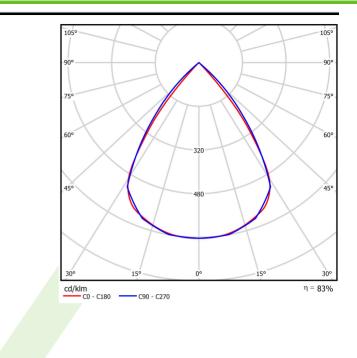






Accessories






Index 19.3200.0009.34







Index 6E1-500KW341P-5Y Name SUSPENSION NEW TYPE-G 34

LENGHT 1,5M WIRE 5X 1-POINT TYPE-Y



Index 6E1-8670-B-Y-1,5 Name SUSPENSION NEW TYPE-L

