

## Product: AGAT CLEAN CLASS 5-6 NO FRAME LED 17600 MICRO-PRM SL E IP65 34 830 KRG3K / 1200X600 Index: 19.4102.2411.34




## Description

Luminary dedicated for the clean rooms of increased cleanliness class ISO 5-6. Luminary designed to module suspended ceilings, equipped with highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Its characteristic feature is lack of aluminum frame what allows to exclude the unwished-for contamination in clean rooms. There are no visible elements joining the diffuser and the luminary body.

Product information	Cat	Category Clean Class 3-9				
	Fan	ily AGAT	AGAT CLEAN CLASS 5-6 NO FRAME LED			
			AGAT CLEAN CLASS 5-6 NO FRAME LED 17600 MICRO-PRM SL E IP65 34 830 KRG3K / 1200X600			
	Inde	x <b>19.410</b>	19.4102.2411.34			
	EAN	590186	5901867420596			
						<b>B</b>
Light and electrical data	Ligh	t source		LED		
	Lun	inous flux LE	D [lm]	17766		
	LED	power [W]		87,2		
	Lun	inaire lumino	us flux [lm]	13058		
	Pov	Power of luminaire [W]		97,7		
	Lun	inaire's light e	efficiency [lm/W]	133,7		
	Cole	r of the light	[K]	3000		
	CRI			>80		
	SDO	M (LED sour	ces)	3		
	Bea	n angle [°]		(C0-C180) / (C9	0-C270) - 89° /	<b>89°</b>
	Pho	obiological ri	sk class (IEC/EN 62471)	) <b>RG0</b>		
	Pro	ection agains	t electric shock	I		
	Pro	ection degree		IP65		
	Volt	Voltage		220240 V, 5060 Hz		
	Life	Lifetime of LED sources [h]		100000		
	Lx/E	у		L80/B10		
	Ope	rating temper	ature range [°C]	5 ÷ 30		
	Driv	er		standard on/of	f (E)	
	Pov	er factor cos	φ	>0,95		
	Circ	uit load capad	city	7 (B10), 12 (B1	6), 12 (C10), 19	9 (C16)



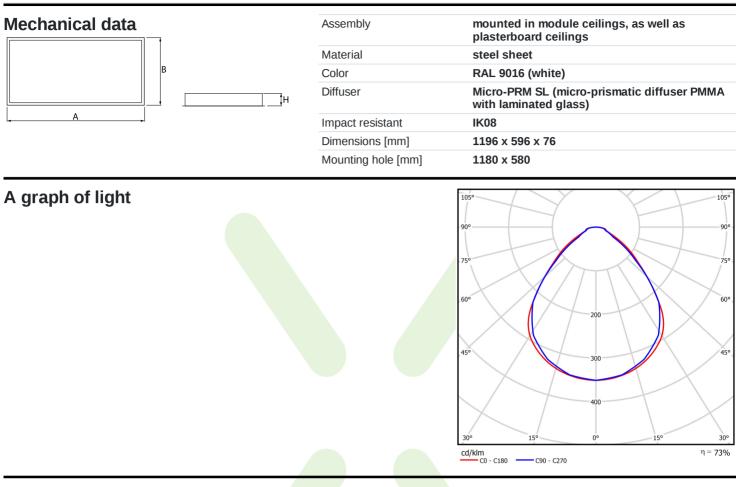

## Accessories

Index 6BZBO60980 Name Handle for pane opening

