Product: RUBIN CLEAN CLASS 3-4 LED 17600 SLMR E IP65 830 KRG3K / 1200X600
Index: 19.4107.6911.34

Description

Luminary dedicated for the clean rooms of increased cleanliness class ISO 3-4. Surface mounted luminary equipped in highly efficient LED sources. Luminary body made from steel sheet, powder coated in white. Diffusers and optical systems in aluminum frame.

Product information

Category	**Clean Class 3-9**
Family	**RUBIN CLEAN CLASS 3-4 LED**
Name	**RUBIN CLEAN CLASS 3-4 LED 17600 SLMR E IP65 830 KRG3K / 1200X600**
Index	**19.4107.6911.34**

Light and electrical data

Light source	**LED**
Luminous flux LED [lm]	**17622**
LED power [W]	**93,6**
Luminaire luminous flux [lm]	**14119**
Power of luminaire [W]	**100,5**
Luminaire's light efficiency [lm/W]	**140,5**
Color of the light [K]	**3000**
CRI	**>80**
SDCM (LED sources)	**3**
Beam angle [°]	**(C0-C180) / (C90-C270) - 100° / 100,2°**
Protection against electric shock	**I**
Protection degree	**IP65**
Voltage	**220..240 V, 50..60 Hz**
Lifetime of LED sources [h]	**100000 (1) / 147000 (2)**
Lx/By	**L80/B10 (1) / L70/B50 (2)**
Operating temperature range [°C]	**5 ÷ 30**
Driver	**standard on/off (E)**
Power factor cos φ	**>0,95**
Circuit load capacity	**7 (B10), 12 (B16), 12 (C10), 19 (C16)**

Mechanical data

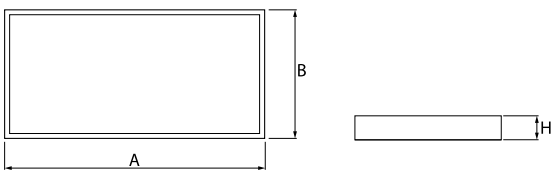

Assembly	**surface mounted on ceiling**
Material	**steel sheet**
Color	**white**
Diffuser	**SLMR (laminated anti-reflective mat glass)**
Impact resistant	**IK08**
Dimensions [mm]	**1220 x 620 x 78**

A graph of light

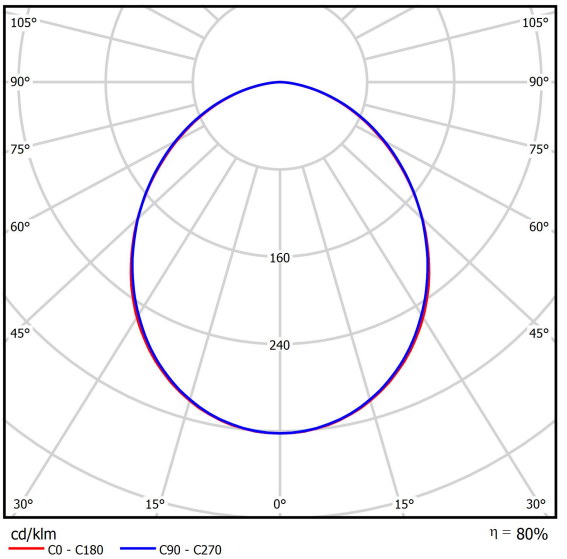

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-04-2024