

**Product:** NUMANCIA M PRO LED 26000 SH WIDE E IP66 12 740

**Index:** 19.4115.8371.12



## Description

Technical floodlight for big spaces. Can be used as indoor or outdoor luminaire at high heights where top light distribution control is required. Ideal for outdoor industrial areas, loading bays, car parks, recreational sports facilities and outdoor open areas. Designed for wall surface mounted, with specific stirrup construction that eases installation. Luminaire body built in die-cast aluminium with protective hardened glass and finish in RAL 9023 (dark grey). Tool-free and fast access to inner parts. Luminaire has a high environment protection of IP65 and IK09 impact resistant, is also provided with inner pressure balancing system. Luminaire adds in an PMMA lens system and multiple optical distributions. Luminaire built-in an Electronic Control Gear.

## Product information

Category	Outdoor luminaires
Family	NUMANCIA M PRO LED
Name	NUMANCIA M PRO LED 26000 SH WIDE E IP66 12 740
Index	19.4115.8371.12
EAN	5902107371562



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	26254,5
LED power [W]	132
Luminaire luminous flux [lm]	23655
Power of luminaire [W]	147,8
Luminaire's light efficiency [lm/W]	160
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 98,6° / 98,4°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 35
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	4 (B10), 7 (B16), 7 (C10), 11 (C16)

**Mechanical data**



Assembly	<b>mounted on wall</b>
Material	<b>aluminum</b>
Color	<b>RAL 9023 (dark grey)</b>
Diffuser	<b>SH (transparent hardened glass)</b>
Impact resistant	<b>IK09</b>
Dimensions [mm]	<b>395 x 93 x 473</b>

**A graph of light**

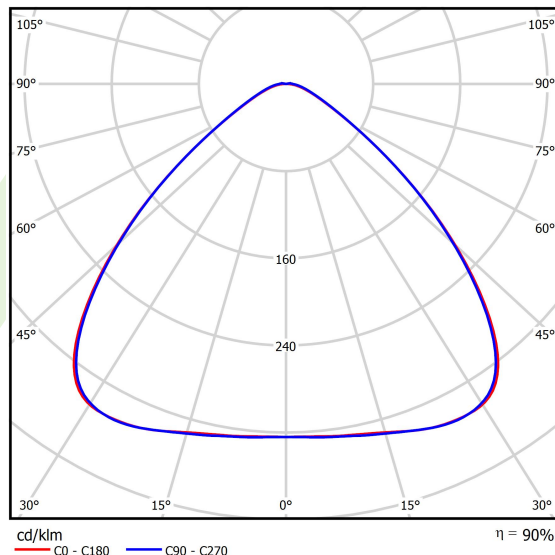

**Accessories**

Index 19.2212.0001.12  
 Name Adapter for mounting FL2 & FL4  
 Numancia EP4CKINGR00001  
 RAL9023

