

**Product:** RUBIN CLEAN CLASS 7-8-9 LED 5200 MICRO-PRM SH EDD IP65 34 840 KRG5DK / 1210X310MM

**Index:** 19.4117.1123.34



## Description

Luminary dedicated for the clean rooms of increased cleanliness class ISO 7-8-9. Surface mounted luminary equipped in highly efficient LED sources. Luminary body made from steel sheet, powder coated in white. Diffusers and optical systems in aluminum frame.

## Product information

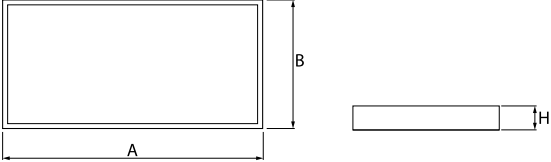
Category	Clean Class 3-9
Family	RUBIN CLEAN CLASS 7-8-9 LED
Name	RUBIN CLEAN CLASS 7-8-9 LED 5200 MICRO-PRM SH EDD IP65 34 840 KRG5DK / 1210X310MM
Index	19.4117.1123.34
EAN	5902107106638



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	5343,4
LED power [W]	24,8
Luminaire luminous flux [lm]	3917
Power of luminaire [W]	27,8
Luminaire's light efficiency [lm/W]	140,9
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 89° / 89°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	25 (B10), 40 (B16), 39 (C10), 62 (C16)

Mechanical data

	Assembly	surface mounted on ceiling
	Material	steel sheet
	Color	RAL 9016 (white)
	Diffuser	Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass)
	Impact resistant	IK08
Dimensions [mm]		1210 x 310 x 78

A graph of light

