

Product: LUXCAN C 2500 60° E 04 930 3F

Index: 19.4124.2331.04



## Description

Monobloc cylindrical spotlight from the family Luxcan C setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature optimised to be used as general & accent lighting for commercial areas shop-windows and different indoor spaces. Designed for Installation on the triphasic track. Body built in extruded aluminium painted with high quality AXALTA coatings finished in popular colours.

## Product information


Category	Projectors
Family	LUXCAN C
Name	LUXCAN C 2500 60° E 04 930 3F
Index	19.4124.2331.04
EAN	5902107258023



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	2178
LED power [W]	16,6
Luminaire luminous flux [lm]	1895
Power of luminaire [W]	18,8
Luminaire's light efficiency [lm/W]	100,8
Color of the light [K]	3000
CRI	92
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 55,4° / 55,6°
Protection against electric shock	II
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	77000 (1) / 100000 (2) / 100000 (3)
Lx/By	L90/B10 (1) / L80/B10 (2) / L70/B10 (3)
Operating temperature range [°C]	-20 ÷ 35
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	16 (B10), 27 (B16), 27 (C10), 44 (C16)

## Mechanical data



Assembly	mounted on a three-phase track
Material	aluminum
Color	RAL 9005 (black)
Diffuser	none
Impact resistant	IK04
Dimensions [mm]	Ø85 x 205

## A graph of light

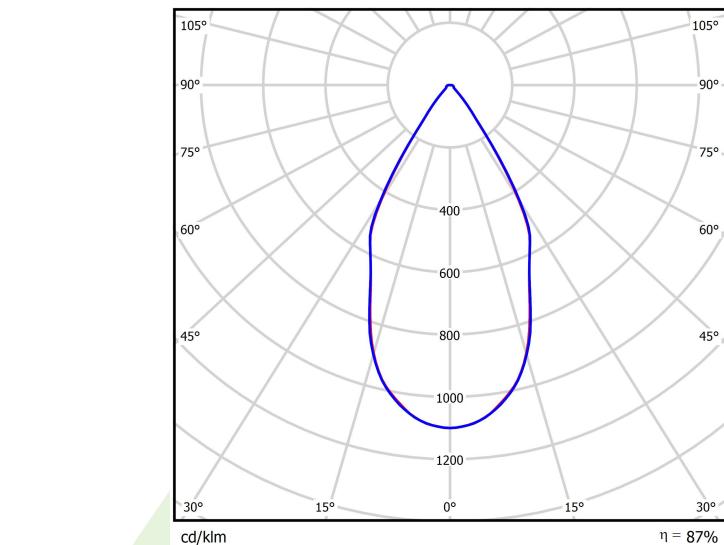

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-02-2026