


Product: BERYL LED NK 2200 PLX E 34 830

Index: 19.4126.2111.34

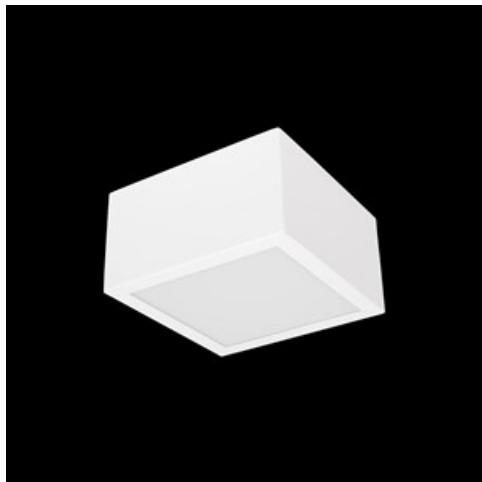

Description

Surface mounted luminary of down light type which is built from powder coated steel sheet. IP20 tightness level. Its diffuser optionally can be made from opal PMMA. BERYL LED NO/NK luminary is perfect to be used in prestige interiors such as hotels, banks, offices, boutiques, and car showrooms.

Product information


Category	Surface mounted luminaires
Family	BERYL LED NK
Name	BERYL LED NK 2200 PLX E 34 830
Index	19.4126.2111.34
EAN	5902107119188



Light and electrical data



Light source	LED
Luminous flux LED [lm]	2193
LED power [W]	15
Luminaire luminous flux [lm]	1717
Power of luminaire [W]	16
Luminaire's light efficiency [lm/W]	107,3
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 79,4° / 79,2°
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	29 (B10), 47 (B16), 49 (C10), 79 (C16)

Mechanical data

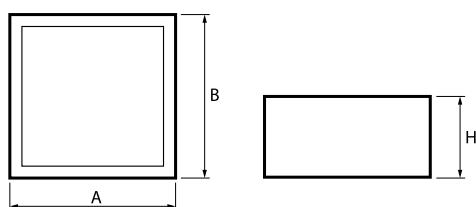

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK06
Weight [kg]	1,99
Dimensions [mm]	200 x 200 x 110

A graph of light

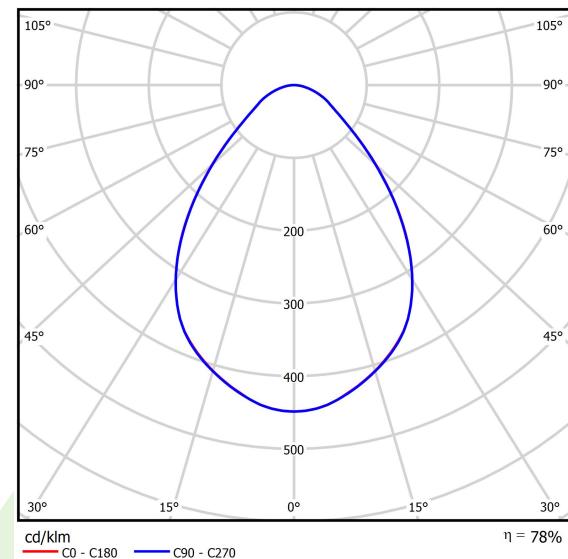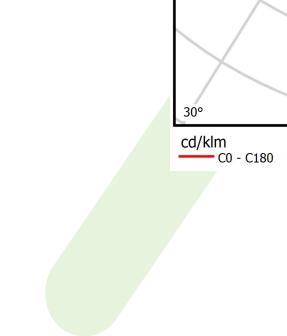

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-02-2026